

- INSTRUCTIONS**
1. Original and subsequent records used to evaluate the corner position.
  2. Description of evidence found, date discrepancy in the record, state method of establishing lost or obliterated corners.
  3. Description of monument and accessories set to perpetuate the corner position.
  4. Sketch or Survey, show all pertinent data which can best be shown in a sketch example, corner marking, topography line, position of accessories, etc.
  5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
  6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

19 | 20  
Corner 30 | 29

T. 34N R. 25W P.M.M Lincoln

County

RECORD: G.L.O.

Set a post 4 ft. long, 4" square, 24" in the ground, for cor. to secs. 19, 20, 29, and 30 marked:

T.34 N., S.20 on N.E.

R.25 W.,S.29 on S.E.

S.30 on S.W., and S.19 on N.W. faces, with 2 notches on S. and 5 notches on E. edges

from which

A spruce, 10" diam., bears S.78 E. 48 lks. dist., marked T.34 N., R.25 W., S. 29 B.T.

A spruce, 8" diam., bears N.61 45 E., 54 lks. dist., marked T.34 N.,R.25W.,S.20 B.T.

A spruce, 10" diam., bears S.4 15'W. 105 lks dist., marked T.34 N.,R.25 N.,S 30 B.T.




A spruce, 6" diam., bears N.77 W. 26 lks. dist., marked T.34 N., R.25 W.,S19 B.T.

FOUND: A 2½" diam., brass cap approx. 9" above ground, adjacent to a 6"X 8"X 5' wood fence post marked as shown.

from which

A aspen 10" diam., bears S.57 E. 105.5 feet dist., scribing visible.  
(See reverse side)

NOTE: Sec. cor. markings on cap are reversed

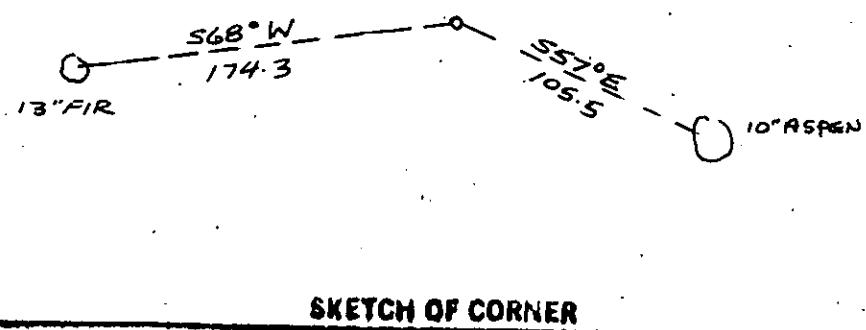

SKETCH OF CORNER

Office of Clerk and Recorder, County of Lincoln

record" was filed for record on the June 16

This "corner

day of 19<sup>83</sup>

was noted on the cross-index plat and is assigned page No. 2217, in

book No. \_\_\_\_\_

Janet B.F. Siegel, by Betty L. Conces  
County Official deputy


Cross Index No.

R-5

T. 34

R. 25

P.M.M.



\* corner this sheet

SET: New bearing trees

A fir 13" diam., bears S.68 W., 174.3 feet dist., inscribed S29  
BT. (as per cap )