

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lies, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

20 | 21

**CERTIFIED CORNER RECORDATION**

Corner 29 | 28 T. 34N R. 25W P.M.M. Lincoln County

RECORD: Original G.L.O. - 1894  
B.L.M. remonumentation notes.

The cor. of secs. 20, 21, 28 and 29, monumented with a shale stone, 14"X 12"X 10", firmly set and dimly mkd. with 4 grooves on the E. and 2 grooves on the S. faces,, and witnessed by the remains of three of the original bearing trees.

At the corner point

Set an iron post, 30" long, 2½" diam., 24" in the ground, with brass cap mkd.



from which

The remains of the original bearing trees:

A stump hole, bears S. 24 45 E., 51 lks. dist., remains of tree lying on ground, no marks visable. (Record)

A stump 16" diam., bears S.29 45 W., 67 lks. dist., mkd. T34N R25W S29 BT. (Record)

A fir, 14" diam., bears N.35½ W., 22 lks. dist., mkd.,with an overgrown blaze. (Record)

The new bearing trees:

A fir, 10" diam., bears N.\*8 E., 37 lks dist., mkd. T34N R25W S21 BT.



A fir, 10" diam., bears S. 19 E., 66 lks. dist., mkd. T34N R25W S28 BT.

A fir, 12" diam., bears N. 75½ W., 55 lks dist., mkd. T34N R25W S20 BT. Bury the original stone alongside of the iron post.

FOUND: A 3½" B.L.M. brass cap mkd. as shown above.

from which

( See reverse side for description of BT!\$.)

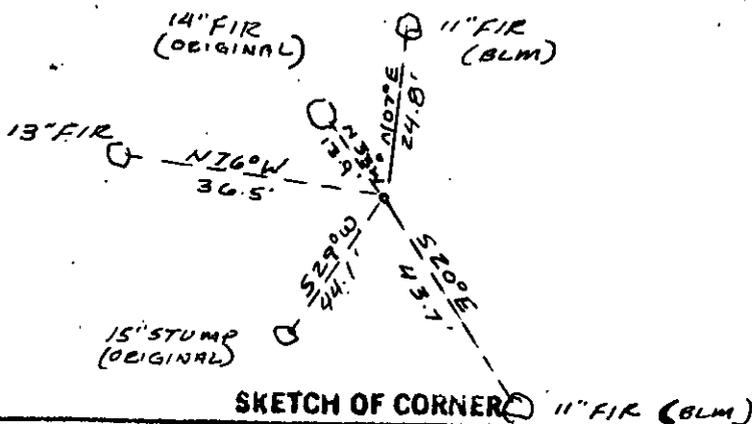

**CERTIFICATION**

I, James W. Reed  
certify the information shown herein is true and correct.  
*James W. Reed*  
Signature Ground Party Chief

I, Thomas C. Hill  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (M.C.A. 82-10, et seq., M.C.A.)  
*Thomas C. Hill*  
Signature of Surveyor & Seal


Date 3/15/83 Reg. No. 5612 S  
U.S.F.S.

Employer: \_\_\_\_\_

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on the JUNE 16 day of 1983 was noted on the cross-index plat and is assigned page No. 2218, in book No. \_\_\_\_\_

*Janet BF Siegel by Betty L. Conner*  
County Official deputy

Cross Index No. R-9 T. 34 R. 25 P.M.M.



A fir 11" diam., bears S. 20 E., 43.7 feet dist., healed face.

A fir 11" diam., bears N. 7 E., 24.8 feet dist., healed face.

A fir 14" diam., bears N. 33 W., 13.9 feet dist., healed face.

A fir 13" diam., bears N. 76 W., 36.5 feet dist., healed face.

A stump 15" diam., bears S. 29 W.