

- INSTRUCTIONS**
1. Original and/or subsequent record used to evaluate the corner position.
 2. Description of evidence found, note discrepancy to the record, state method of establishing lot or numbered corners.
 3. Description of monument and accompanying set to perpetuate the corner position.
 4. Sketch or plan, show all pertinent data which can best be shown in a sketch example, corner marking, topography, tree position of accessories, etc.
 5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.

29 28

CERTIFIED CORNER RECORDATION

Corner #32 33

T. 34N

R. 25W

P.M.M. Lincoln

County


RECORD: Original G.L.O. - 1894

From B.L.M. remonumentation notes.

The cor. of secs. 28, 29, 32 and 33, as determined from the remains of the original bearing trees.

At the corner point

Set an iron post, 30" long, 2½" diam., 22" in the ground, in concrete, and in a mound of stone, 2½ ft. diam., to top, with brass cap mkd.

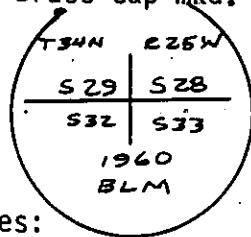

from which

The remains of the original bearing trees:

A fir, 14" diam., bears N. $14\frac{1}{2}$ E., 85 lks. dist., with burned out blaze.
(Record N. $13\frac{1}{4}$ E., 85 lks.)



A stump hole, bears S. $65\frac{1}{2}$ E., 35 lks. dist., remains of tree lying on ground, with burned out blaze.(Record: S. $67\frac{1}{2}$ E., 35 lks.)

A fir, 18" diam., bears S. $19\frac{1}{2}$ W., 37 lks. dist., mkd. with overgrown blaze.
(Record)

A stump hole, bears N. $14\frac{1}{4}$ W., 32 lks. dist., remains of tree lying on ground, visable marks 34 25W S2. (Record)

A fir, 8" diam., bears N. 32° E., 29 lks. dist., mkd. T34N R25W S28 BT.

A fir, 8" diam., bears S. 39° E., 137 lks. dist., mkd. T34N R25W S33 BT.
(See reverse side).

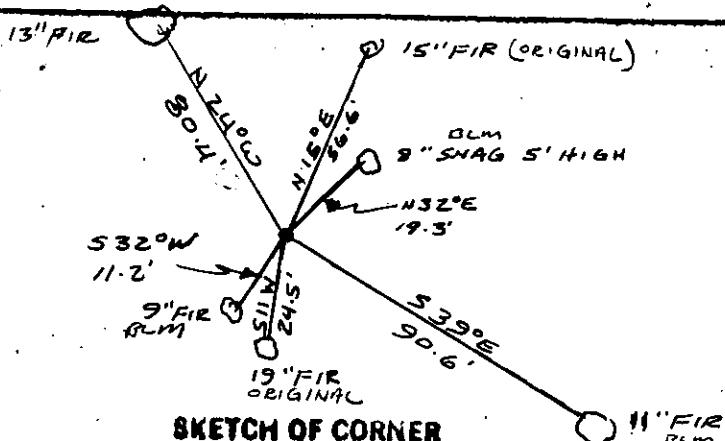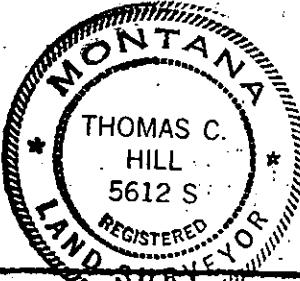

I, James W. Reed, certify the information above herein to be true and correct.

James W. Reed
Signature of Surveyor & Clerk

I, Thomas C. Hill,

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Surveyor Registration Act" (10-22-201, et seq., M.D.A.)

Thomas C. Hill
Signature of Surveyor & Clerk

Date: 3/15/83 Reg. No. 5612 S

Employer: _____


Office of Clerk and Recorder, County of Lincoln. This "corner" record was filed for record on the 16 day of 1983.

was noted on the cross-index plat and is assigned page No. 2220, in

book No. _____

*Janet BF Siegel by Betty L. Concess
County Official Deputy*

Cross Index No. V-9 T. 34 R. 25 P.M.M.

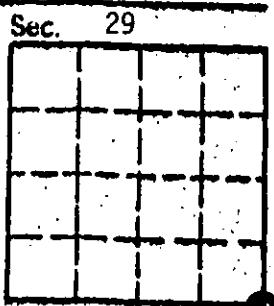

A fir 6" diam., bears S. $31\frac{1}{4}^{\circ}$ W., 17 lks. dist., mkd. T34N R25W S32 BT.

A fir 12" diam., bears N. 225° W., 122 lks. dist., mkd. T34N R25W S29 BT.

FOUND: A $3\frac{1}{2}$ " B.L.M. brass cap 3" above ground, surrounded by a mound of stone mkd. as shown on reverse side

from which

A fir 15" diam., bears N. 15° E., 56.6 feet dist., healed face.

A 5' high snag 8" diam., bears N. 32° E., 19.3 feet dist., scribing visable.

A fir 11" diam., bears S. 39° E., 90.6 feet dist., healed face.

A fir 19" diam., bears S. 11° W., 24.5 feet dist., healed face.

A fir 9" diam., bears S. 32° W., 11.2 feet dist., healed face.

A

A fir 13" diam., bears N. 24 W., 80.4 feet dist., healed face.