

- INSTRUCTIONS**
1. Original and/or subsequent record used to evaluate the corner position.
 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 3. Description of monument and accessories set to perpetuate the corner position.
 4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography, etc., position of accessories, etc.
 5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner N.S. 1/64 Sec. 29 T. 24 N. R. 25 W. P.M.M. LINCOLN County


RECORD: No previous record on file.

FOUND: Nothing to show evidence of a monumented corner.

SET: A 30" aluminum pipe approx. 28" in the ground, with a $3\frac{1}{4}$ " aluminum cap marked as shown from which

A fir 7" diam., bears N 06 W 15.1 feet dist., scribed "X BT".

A fir 19" diam., bears S'08 E 29.6 feet dist., scribed "S29 NS1/64 BT".

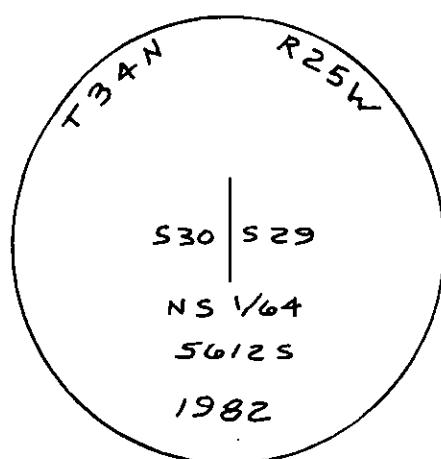

Q 7" FIR

15°
10'
FM. 20'
9'
2.62'
1.5'
1.88'

O 19" FIR

SKEETCH OF CORNER

CERTIFICATION

I, James W. Reed, certify the information shown herein is true and correct.

James W. Reed
Signature Ground Party Chief

I, Thomas C. Hill, certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Reaffirmation Act" (70-12-101, M.sq., M.D.A.)

Thomas C. Hill
Signature of Surveyor & Seal
Date: 3/15/83 Reg. No. 5612 S
Employer: U.S.F.S.

Office of Clerk and Recorder, County of Lincoln This "corner"


record was filed for record on the June 16 day of 1983

was noted on the cross-index plat and is assigned page No. 2227, in

book No. _____

Jinet BF Siegel by Betty L. Conces
County Official Deputy

Cross Index No. T. 24 R. 25 P.M.M.



* - corner this sheet

