

- INSTRUCTIONS**
1. Original and/or subsequent record used to establish the corner position.
 2. Description of evidence found, note discrepancies in the records, state method of establishing lots or other legal corners.
 3. Description of instruments and accessories apt to perpetuate the corner position.
 4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner mapping, topography, etc., position of accessories, etc.
 5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.

30-29

CERTIFIED CORNER RECORDATION

Corner 31 32

T. 34N

R. 25W

P.M.M. Lincoln

County


RECORD: Original G.L.O. + 1894

From B.L.M. remonumentation notes.

The cor. of secs. 29,30,31 and 32, as determined from the remains of three of the original bearing trees.

At the corner point

Set an iron post, 30" long, $2\frac{1}{2}$ " diam., 26" in. the ground, in concrete, with brass cap.mkd.

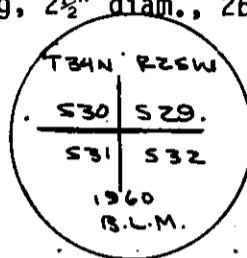



From which

The remains of the original bearing trees:

- A stump, 26" diam., bears N. $47\frac{1}{4}^{\circ}$ E., 66 lks. dist., visable marks BT. (record) (~~GONE~~)
- A stump, 36" diam., bears S. $71\frac{1}{2}^{\circ}$ W., 68 lks. dist., visable marks BT. (record)
- A stump, 24" diam., bears N. $31^{\circ}45'W.$, 33 lks. dist., visable marks BT. (record: N. $28\frac{1}{4}^{\circ}$ W., 33 lks.)

The new bearing trees:

- A larch 5" diam., bears N. $10\frac{1}{2}^{\circ}$ E., 15 lks. dist., mkd. T34N R25W S29 BT.
- A larch 8" diam., bears S. 40° E., 43 lks. dist., mkd T34N R25W S32 BT. (~~GONE~~)
- A fir &" diam., bears S. $68\frac{1}{2}^{\circ}$ W. 95 lks. dist., mkd. T34N R25W S31 BT. (~~GONE~~)
- A larch, 8" diam., bears N. $58^{\circ}45'W.$, 26 lks. dist., mkd. T34N R25W S30 BT. (See reverse side)

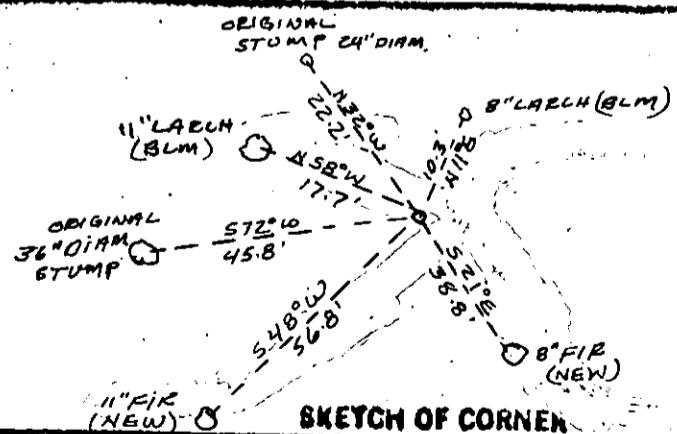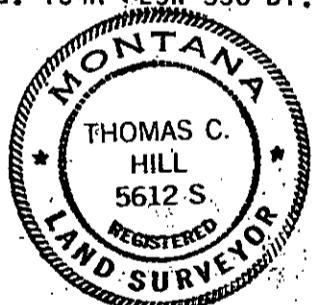

SKETCH OF CORNER


Office of Clerk and Recorder, County of LINCOLN
record" was filed for record on the JUNE 16

was noted on the cross-index plat and is assigned page No. 2233, in
book No. _____

*Janet BF Siegel by Betty L. Conces
County Official Deputy*

Cross Index No. V-5

T. 31 R. 25 P.M.

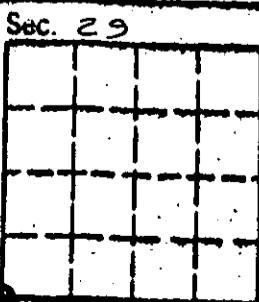

• corner this sheet

This "corner

day of 1983

Sec. 29

Raise a mound of stone 3 ft. bsaee., 2 ft. high, W. of iron post.

FOUND: A 3½" B.L.M. brass cap approx. 2" above ground mkd. as shown an reverse side.
from which

The remains of the bearing trees:

A stump 24" diam., bears N. 32°W., 22.2 feet dist., BT sign attached.

A stump 20" diam., bears S. 72°W., 45.8 feet dist., BT sign attached.

The B.L.M. 1960 bearing trees:

A larch 8" diam., bears N. 11°E., 10.3 feet dist., healed face.

A larch 11" diam., bears N. 58°W., 17.7 feet dist., healed face.

SET: N New bearing trees:

A fir 11" diam., bears S. 48°W., 56.8 feet dist., scribed " X BT".

A fir 8" diam., bears S. 21°E., 38.8 feet dist., scribed " X BT".