

- INSTRUCTIONS**
1. Original and/or subsequent record used to evaluate the corner position.
  2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
  3. Description of monument and accessories set to perpetuate the corner position.
  4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography etc., position of accessories, etc.
  5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
  6. Fill in Cross Index & Section Diagram at bottom of sheet.

29

## CERTIFIED CORNER RECORDATION

Corner 1/4 32

T. 34N

R. 25W

P.M.M. Lincoln.

County


RECORD: Original G.L.O. - 1894

B.L.M. remonumentation notes.

The 1/4 sec. cor. of secs. 29 and 32 as determined from the remains of the original bearing trees.

At the corner point

Set an iron post, 30" long,  $2\frac{1}{2}$ " diam., 224" in the ground, in concrete, with brass cap marked.



from which

The remains of the original bearing trees:

A stump, 16" diam., bears S  $79\frac{1}{4}^{\circ}$  E, 24 lks. dist., visable marks  $\frac{1}{4}$  S. (RECORD)

A stump, 18" diam., bears N  $31^{\circ}$  W, 22 lks. dist., mkd.  $\frac{1}{4}$  S BT. (RECORD)

The new bearing trees:

A spruce, 10" diam., bears S.  $7\frac{1}{4}^{\circ}$  W., 21 lks. dist., mkd.  $\frac{1}{4}$  S32 BT.



A spruce 6" diam., bears N.  $45^{\circ}45'$  W., 13 lks. dist., mkd.  $\frac{1}{4}$  S29 BT.

FOUND: A  $3\frac{1}{2}$ " B.L.M. brass cap approx. 7" above ground, adajacent to a 4"X4"X3' wood post, monument lies under a N & S fence line, marked as shown above.

from which

A spruce 11" diam., bears N  $45^{\circ}45'$  W 8.8 feet dist., healed face.

An spruce 13" diam., bears S  $07^{\circ}$  W 14.5 feet dist., healed face.

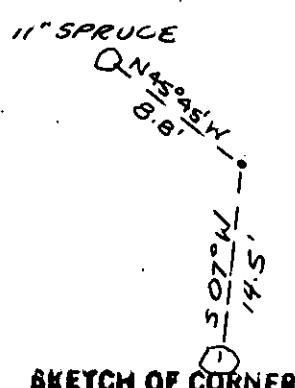


**SKETCH OF CORNER**

CERTIFICATION	
I, <u>James W. Reed</u> , certify the information shown herein is true and correct, <u>James W. Reed</u> Signature Ground Party Chief	
I, <u>Thomas C. Hill</u> , certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recording Act" (18-22-20), et seq., M.D.A. <u>Thomas C. Hill</u> Signature of Surveyor & Seal	
Date: <u>3/15/83</u>	Reg. No. <u>5612 S</u>
Employer: <u>U.S.F.S.</u>	

Office of Clerk and Recorder, County of LINCOLN This "corner  
record" was filed for record on the June 16 day of 1983  
was noted on the cross-index plat and is assigned page No. 2234, In  
book No. \_\_\_\_\_

Janet B.F. Siegel by Betty L. Concess  
County Official Deputy

Cross Index No. V-7 T. 34 R. 25 P.M.M.



\* - corner this sheet

