

# CERTIFIED CORNER RECORDATION

Corner W 1/16 Sec. 17 / 20 T. 34N R. 25W P.M., MT Lincoln County

I. 1981 original record by J. H. Ninneman: Set a steel pin, 24 ins. long, 5/8 in. diam., with a cap mkd. "J.H.N. 4661S";

from which:

A larch, 16 ins. diam., bears S 86°W, 33.0 ft. dist., mkd. "W 1/16 X 20 BT".  
A fir, 8 ins. diam., bears N 48°W, 24.5 ft. dist., mkd. "W 1/16 S17 BT".

Attached location posters to bearing trees.

II. Found a rebar, firmly set, with a plastic cap, mkd. "J.H.N. 4661S";

from which:

A larch, 17 ins. diam., bears S 85°W, 32.9 ft. dist., with visible scribing and attached location poster.  
A fir, 16 ins. diam., bears N 47°W, 24.2 ft. dist., with a healed face and attached location poster.

III. At the corner point:


Set a 30 ins. long, 2 1/2 ins. diam. alum. pipe, 25 ins. in the ground, with a 3 1/4 ins. diam. alum. cap, mkd. as shown. Placed original rebar inside alum. pipe.



Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.

Set a steel guard post South, 2.9 ft. dist. from corner, with Land Survey Monument and Property Boundary decals.

Magnetic Declination: 20° East.

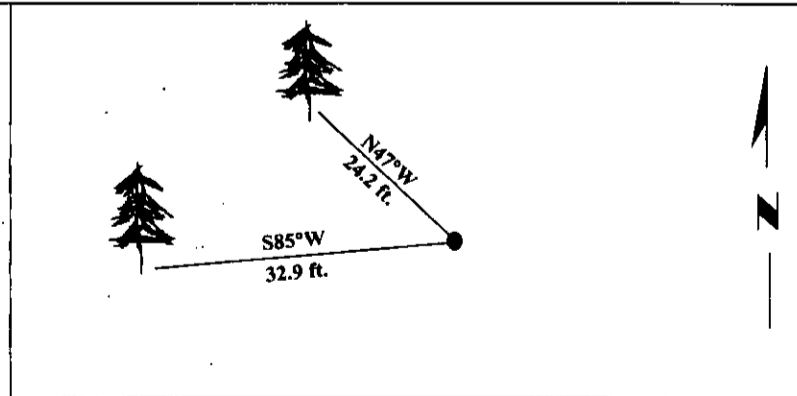


SKETCH OF CORNER

CERTIFICATION	
I. <u>Mark Federman</u>	certify the information shown herein is true and correct.
II. <u>Alvah F. Hughes</u>	certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (7A-22-101 et seq., M.C.A.)
Date:	<u>1/17/96</u>
Reg. No.:	<u>7322LS</u>
Employer:	<u>U.S. FOREST SERVICE</u>

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on JULY 29, 1997 was noted on the cross-index plat and is assigned page No. 9795 in book No. CORAL M. CUMMINGS By delB

County Official



JULY 28, 1927

CORAL M. CUMMINGS