INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross-Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 5 1/16 SECTIONS 3 & 4 T. 34 N R. 26 W P.M.M. LINCOLN County

(1) NO ORIGINAL RECORD

(2) NO EVIDENCE FOUND

(3) SET A 5/8" RE-BAR CAPPED GEB 4974S, FROM WHICH A SPRUCE 10" DIAMETER BEARS N 67°E 60.6 FEET. NO OTHER TREES AVAILABLE.

C.O.S. No. _____

G.E.B. 4974S

1¼" P.V.C. CAP

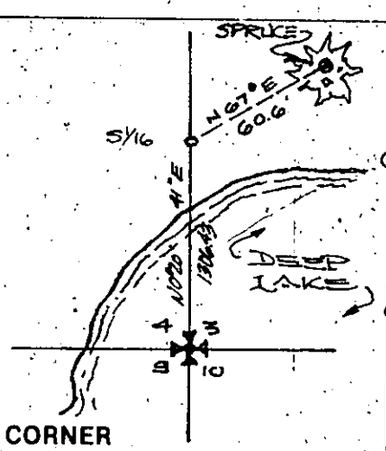

SKETCH OF CORNER

CERTIFICATION

I, GERALD E. BUNTON certify the information shown hereon is true and correct.

Signature, Original Only, & Seal

I, GERALD B. BUNTON certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Corner Recordation Act (Ch. 22-101, et seq., MCA).

Signature of Surveyor & Seal

Date: 8-25-83 Reg. No. 4974-S

Employer: BUNTONS TECHNICAL SERVICES

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on the 21ST day of NOV. 1983, was noted on the cross-index plat and is assigned page No. 2367, in book No. Janet B. Voigt by Betty L. Cones County Official deputy

Sec. 4 T34N R26W



* - corner this sheet

Cross Index No. _____ T. 34 R. 26 PMM