

- INSTRUCTIONS
1. Original and/or subsequent record used to evaluate the corner position.
 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 3. Description of monument and accessories set to perpetuate the corner position.
 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
 5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner E $\frac{1}{2}$ Corner Sec. 2 T. 34N R. 26W P.M.M. Lincoln County

- (1) Set a post, 3 ft. long 3 ins. square 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked $\frac{1}{4}$ S. on W. face, from which A fir, 12 ins. diam., bears N $17^{\circ}45'W$ 41 lks. dist. marked $\frac{1}{4}$ SBT
The $\frac{1}{4}$ sec. cor. of secs. 1 and 2, as determined from the remains of the original bearing trees. At the corner point Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 28 ins. in the ground, in concrete, with brass cap marked.

T34N R26W

$\frac{1}{4}$

S 2 S 1

1959 from which


The remains of the original bearing trees: A stump, 17 ins. diam., bears N. $17^{\circ}3/4^{\circ}W$ 41 lks. dist., visible marks BT. (record)

The new bearing trees: A fir, 6 ins. diam., bears N. $16^{\circ}E$, 35 lks. dist., marked $\frac{1}{4}$ S1 BT. A fir, 6 ins. diam., bears S. $76^{\circ}4^{\circ}W$, 35 lks. dist., marked $\frac{1}{4}$ S1 BT.
Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of the iron post.

- (2) Found BLM brass capped monument stamped as shown below from which:
A 12" doug. fir (scribing overgrown) bears S $76^{\circ}W$ 35 lks.
A 20" fir stump (some scribing visible) bears N $87^{\circ}E$ 51 lks.
A 10" Doug fir (scribing overgrown) bears N $16^{\circ}E$ 35 lks.
A mound of stone 2 ft. X 0.8 ft. 1 ft. west of corner.



FOUND
BLM
B.C.

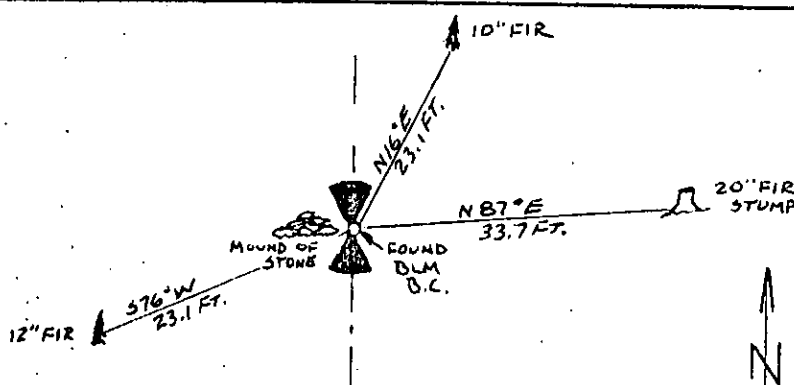

SKETCH OF CORNER

CERTIFICATION
David Stannley

I, _____
certify the information shown herein is true and correct.

Signature, Ground Party Chief

I, Jack H. Ninneman

certify that this Corner Record correctly represents work performed by me or under by direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Jack H. Ninneman
Signature of Surveyor & Seal


Date: 1/25/84 Reg. No. 46615

Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the March 1st day of 1984 was noted on the cross-index plat and is assigned page No. 2470, in book No. _____

Cross Index No. _____ T. 34N R. _____ P.M.M.

Sec. 2



• corner this sheet

