

## INSTRUCTIONS



1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lies, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner E 1/16 Cor. between Sec. 2 & 35 T. 34N R. 26W P.M.M. Lincoln County

(1) This corner was not previously set.

- (3) Set 3 1/2" aluminum cap on 30" aluminum pipe stamped as shown below from which  
 An 8 in. Doug fir (scribed E 1/16 S2 BT) bears S 32°W 42.5 ft.  
 A 6 in. larch (scribed E 1/16 S35 BT) bears N 72°E 26.6 ft.  
 A location poster on a 3 in. larch bears S 5°E 15.1 ft.  
 Painted monument and accessories with bright red paint.

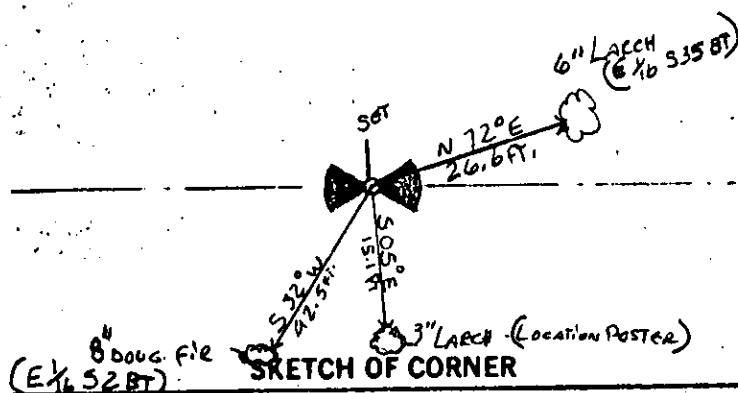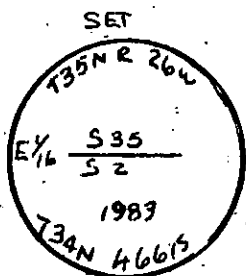

## CERTIFICATION

I, Walter Gibbons

certify the information shown herein is true and correct.

Walter Gibbons

Signature Ground Party Chief

Jack H. Ninneman

I, Jack H. Ninneman  
 certify that this Corner Record correctly represents work performed  
 by me or under my direction in compliance with the "Corner  
 Recordation Act" (70-22-101, et seq., M.D.A.)

Jack H. Ninneman  
 Signature of Surveyor & Seal

Date: 12/13/83 Reg. No. 4661S

Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner  
 record" was filed for record on the March 1st day of 1984  
 was noted on the cross-index plat and is assigned page No. #2476, in  
 book No. \_\_\_\_\_

Janet B.F. Siegel by Karen R. Kampfe  
 County Official deputy

