

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

corner W.C. TO THE SW Corner Sec. 3 T. 34N R. 26W P.M.M. Lincoln County


- (1) Set a post, 4 ft. lon, 4 ins. square, with marked stone 12 ins. in the ground, for W.C. to cor. to secs. 3,4,9, and 10, marked W.C., with T.34N., S. 3 on N.E., R.26W., S.10 on S.E., S. 9 on S.W., and S.4 on N.W. faces, with 5 notches on S. and 4 notches on E. edges, dug pits, 18 X 18 X 12 ins. N.E., S.E., S.W. and N.W. of post, 5 1/2 ft. dist., and raised a mound of earth, 2 ft. high, 4 1/2 ft. base, around post.

The witness cor. of Secs. 3,4, 9 and 10, as determined from the remains of the original bearing trees. At the corner point Set an iron post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, in concrete, with brass cap marked


T34N R26W
S 4 | S 3
S 9 | S 10
W C
1960

- from which The remains of the original bearing trees:
A stump, 23 ins. diam., bears NORTH, 20 lks dist., visible marks BT. (record)
New BTs
A fir 9 ins. diam. bears N 25°29'E., 59 1/2 lks distance marked X BT.
A fir 8 ins. diam. bears S 39°07'E., 28 lks. distance marked X BT.
Raise a mound of stone 3 ft. base 2 ft high W of corner
BLM BT tags on all BTs.

- (2) Found an aluminum cap monument by 2520S marked as shown below from which
A 12 in. Spruce (visible scribing) bears S 6°45'E 82.5 ft.
An 8 in. Spruce (visible scribing) bears N 72°W 72.3 ft.



Corner falls in "Deep Lake"- unable to rub or occupy.

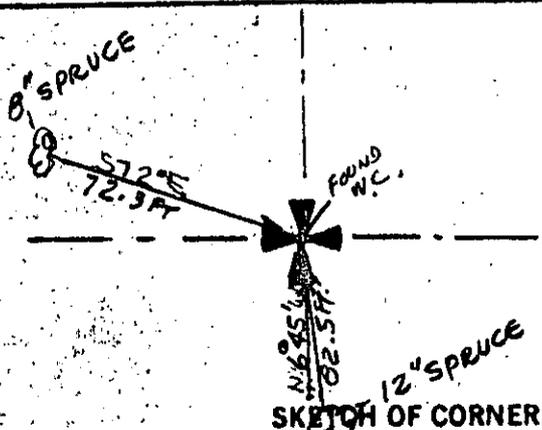

SKETCH OF CORNER

CERTIFICATION

I, David Stanley
certify the information shown herein is true and correct.
David Stanley
Signature Ground Party Chief

I, Jack H. Ninneman
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)
Jack H. Ninneman
Signature of Surveyor & Seal

Date: 12/13/83 Reg. No. 4661S
Ninneman Engineering Inc.
Employer: _____

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the March 1st day of 1984 as noted on the cross-index plat and is assigned page No. 2489, in Book No. _____
Janet B. F. Siegel by Karen P. Kampfe
County Official Deputy

Sec. 3

