

- INSTRUCTIONS
1. Original and/or subsequent record used to establish the corner position.
  2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
  3. Description of monument and accessories set to perpetuate the corner position.
  4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
  5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
  6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner  $N\frac{1}{4}$  Cor. between Sec. 3 & 34 T. 34N R. 26W P.M.M. Lincoln County



- (1) Set a limestone 14 X 12 X 6 ins. 10 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked  $\frac{1}{4}$  on N. face; from which  
 A fir 18 ins. diam., bears S  $58^{\circ}W$  92 lks. dist., marked  $\frac{1}{4}$ S. B.T.  
 A fir 12 ins. diam., bears N  $54^{\circ}15'$  58 lks. dist., marked  $\frac{1}{4}$  S. B.T.  
 Set a 30 X  $2\frac{1}{2}$  in. Iron post 28 ins. in the ground with brass cap marked:→  
 Poured concrete around I.P., and buried original stone alongside I.P.

T35NR26W  
 $\frac{1}{4}$  S34  
 $\frac{1}{4}$  S3  
 T34NR26W  
 1959

**New BTs:**

- A larch 9 in. diam., bears N  $16\frac{1}{2}^{\circ}E$ , 28 lks. dist., marked  $\frac{1}{4}$ S34BT
- A larch 6 in. diam., bears N  $82\frac{3}{4}^{\circ}W$  47 $\frac{1}{2}$  lks. dist. marked  $\frac{1}{4}$ S34BT
- Raise a mound of stone 3 ft. base, 2 ft. high North of I.P.
- BLM BT poster places on new BTs.

- (2) Found: BLM brass capped monument stamped as shown below from which:  
 An 8 in. larch (scribing visible) bears N  $16\frac{1}{2}^{\circ}E$  28 lks.  
 A 16 in. Doug. fir stump (scribing legible) bears S  $58^{\circ}W$  88 lks.  
 A 6 in. larch (scribing visible) bears S  $82\frac{3}{4}^{\circ}W$  47 $\frac{1}{2}$  lks.  
 Mound of stone  $2\frac{1}{2}' \times 1\frac{1}{2}'$  0.8' North of corner
- (3) Set a 6 in. larch snag (scribed S3 T34N., R.26W. BT) bears S  $80^{\circ}W$  34.5 ft.

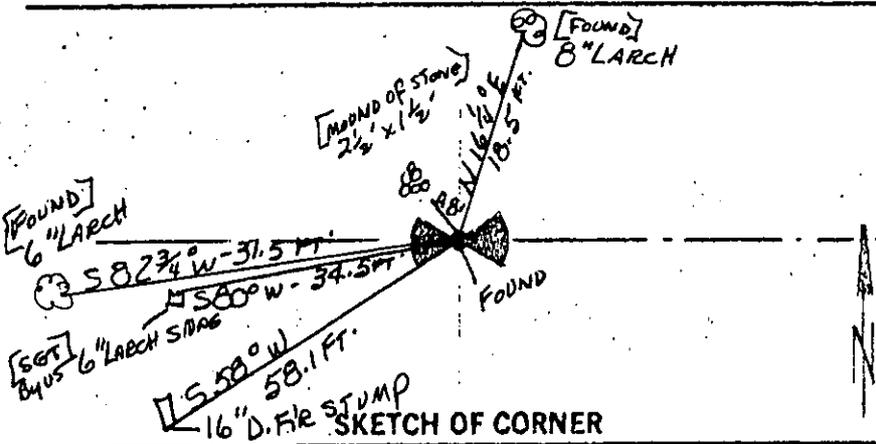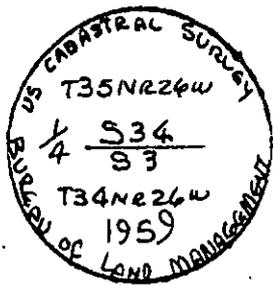

**CERTIFICATION**

David Stanley

I, David Stanley, certify the information shown herein is true and correct.  
 Signature of Ground Party Chief

Jack H. Ninneman

I, Jack H. Ninneman, certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-27-101, et seq., M.D.A.)  
 Signature of Surveyor & Seal  
 4661S

Date: 12/13/83, Reg. No. \_\_\_\_\_

Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of Lincoln, This "corner record" was filed for record on the March 1<sup>st</sup> day of 1984 was noted on the cross-index plat and is assigned page No. # 2490, in book No. \_\_\_\_\_

Janet B. F. Siegel by Karen J. Kampfer  
 County Official *deputy*

