

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lies, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner S $\frac{1}{4}$  Sec. 11 T. 34N R. 26W P.M.M. Lincoln County

- (1) Set a quartzite stone 12 X 10 X 8 ins., 8 ins. in the ground for  $\frac{1}{4}$  sec. cor. marked  $\frac{1}{4}$  on W. face from which

A fir 10 ins. diam., bears S 30°W., 41 lks. dist., marked  $\frac{1}{4}$  S. BT

A tamarack 36 ins. diam., bears N 68° 15'W 18 lks. dist. marked  $\frac{1}{4}$  S BT

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$  ins. diam., 26 ins. in the ground, in concrete, with brass cap marked

T34N R26W

$\frac{1}{4}$  S 11  
S 14

1960 from which

The remains of the original bearing trees:

A stump, 10 ins. diam., bears S 0°30'W., 41 lks. dist., visible marks BT.  
(record: S 30°W., 41 lks.)

A stump, 36 ins. diam., bears N 68 $\frac{1}{2}$ °W., 18 lks. dist., visible marks BT. (record)

The new bearing trees:

A fir, 6 ins. diam., bears S. 41°E., 64 lks. dist., marked  $\frac{1}{4}$  S14 BT

A fir, 10 ins. diam., bears N. 30 3/4°W., 141 lks. dist., marked  $\frac{1}{4}$  S11 BT.


Raise a mound of stone, 3 ft. base, 2 ft. high, N. of the iron post.

- (2) Found: BLM brass capped monument stamped as shown below from which  
A 14" Doug. fir (scribing overgrown) bears N 30°43'W 140 3/4 lks. dist., BT.  
A 16" Doug. fir (scribing overgrown) bears S 40°54'E 64 lks. dist. BT.

- (3) Set: A location poster on a 28" Pine stump bears N 72°E 9.6 ft.



FOUND  
BLM  
B.C.

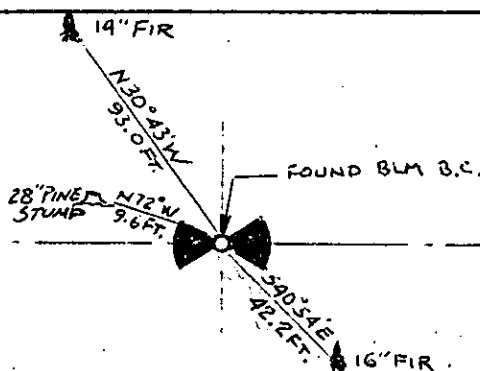

SKETCH OF CORNER

## CERTIFICATION

David Stanley

I certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Jack H. Ninneman

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Signature of Surveyor & Seal

Date: 1/26/84 Reg. No. 46615


Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the March 1<sup>st</sup> day of 1984, was noted on the cross-index plat and is assigned page No. #2501, in book No. \_\_\_\_\_

Janet B. F. Siegel by Karen K. Kampa  
County Official deputy

Cross Index No. \_\_\_\_\_ T. 34N R. 26W PMM

Sec. 11

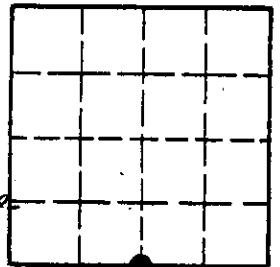

• - corner this sheet

