

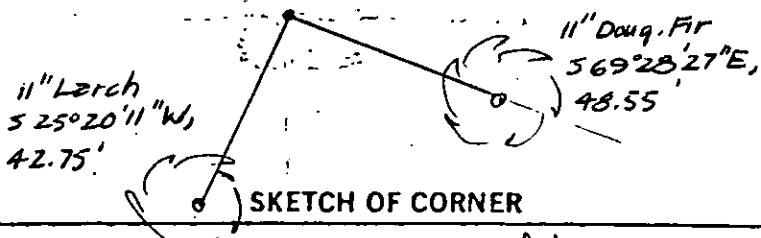
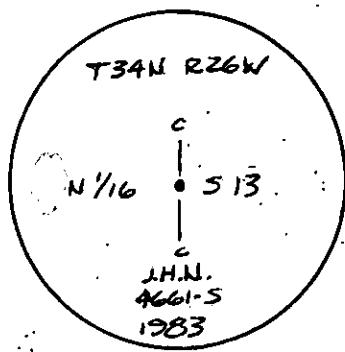
INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lines, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner C-N 1/16 Sec. 13 T. 34 N R. 26 W P.M.M. Lincoln County

1. This corner was not previously set.
2. Set a 3"X30" aluminum capped monument marked as shown below, from which:
 A 11" Douglas Fir bears S 69 28 27 E, 48.55 feet, marked "CN 1/16 S 13 BT" and posted.
 A 11" Larch bears S 25 20 11 W, 42.75 feet, marked "CN 1/16 S 13 BT" and posted.
 I painted the monument and accessories with bright red paint and attached a Land Monument sign to a metal fence post next to the corner.

CERTIFICATION
James R. Staples

certify the information shown herein is true and correct.

James R. Staples
Signature Ground Party Chief

Jack H. Ninneman

certify that this Corner Record correctly represents work performed
by me or under my direction in compliance with the "Corner
Recordation Act" (70-22-101, et seq., M.D.A.)Jack H. Ninneman
Signature of Surveyor & SealDate: 11/15/83 Reg. No. 46613Employer: NINNEMAN ENGINEERING

ce of Clerk and Recorder, County of Lincoln. This "corner
ord" was filed for record on the March 1st day of 1984,
noted on the cross-index plat and is assigned page No. #2523, in
k No. _____

Janet B.F. Siegel by Karen L. Kamps
County Official Deputy

