FLATHEAD LAND CONSULTANTS
M. L. HAIGES, RLS
KALISPELL MERCANTILE BUILDING
P. O. BOX 572
KALISPELL, MONTANA 59901
756-2202

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

ORIGINAL G.L.O. NOTES: " 40.00 Chains. Set a post, 3 ft long 3ins square 24 ins in the ground for ¼Sec Cor marked ¼S on W face from which A tamarack 32 ins diam bears S45°E, 35 lks dist marked ¼S.B.T. A fir 6 ins diam bears S73°15'W 19lks dist marked ¼S.B.T."

FOUND: Found fence intersection to be located at proper G.L.O. Bearings and Distances from afound larch and fir stumps (Note: Stumps were burned and no evidence of scribing was found) See back for Record and Found Bearings and Distances.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

To perpetuate this corner we used the existing fence intersection and two possible bearing trees. The corner was replaced with a 2" galv. pipe 30" long, with 6" flange, buried 24" in the ground. Marked as shown.

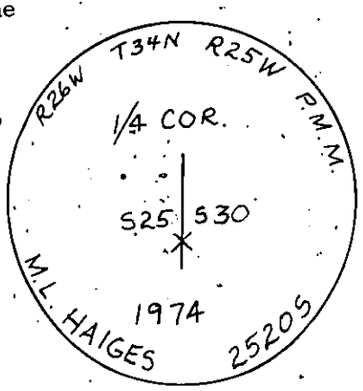

Date of work: June 4, 1974

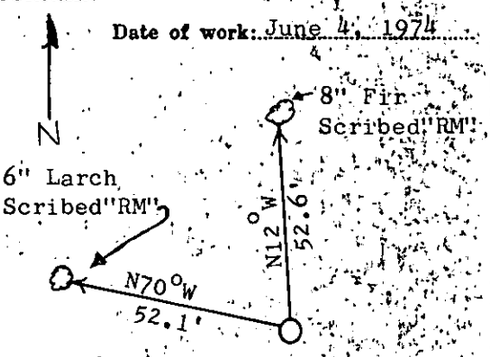

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

(See Back)

Surveyor's Seal

I, JAMES BURTON certify that the information shown herein is true and correct.

James Burton
Signature of Ground Party Chief

I, M.L. HAIGES certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

FLATHEAD LAND CONSULTANTS
KALISPELL MERCANTILE BUILDING
P.O. BOX 572
KALISPELL, MONTANA 59901
756-2202

M L Haiges
Signature of Surveyor

2520 S
Registration Number

DIAGRAM OF CORNER:

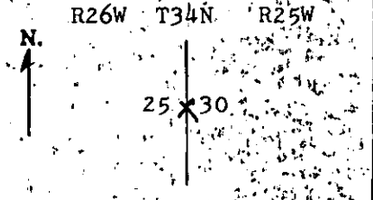

= Corner recorded on the sheet

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 5th day of August 19 74, was noted on the cross-index plat and is assigned page No. 358, in book No. 1

Eleanor L Vaughn By: Mae Watson Deputy
County Official

Form 125 — 45227

Cross Index No. T-25 T. 34 R. 26 Mer.

½ SECTION 25 BREAKDOWN

23 24 / 26 25 — B.L.M. BRASS-CAP

24 — B.L.M. BRASS-CAP

N00°23'23"E 2636.56'

N00°09'56"E 2639.64'

26 — N89°39'04"W 2612.86' — SET 2" BRASS-CAP

SET 2" BRASS-CAP — N89°39'04"W 2615.48' — 30

SET 2" BRASS-CAP

N00°09'56"E 1323.50'

NORTH 1328.72'

S89°32'14"E 1309.68' 1309.68' 1309.68'

SET 2" BRASS CAP

N00°23'23"E 2636.56'

N00°09'56"E 1323.50'

NORTH 1328.72'

26 / 35 — 25 / 36 — S89°25'24"E 2623.24' — 36 — S89°25'24"E 2623.24' — 25 / 36 — 30 / 31

B.L.M. BRASS-CAP

SET 2" BRASS-CAP

SET 2" BRASS-CAP