

CERTIFIED LAND CORNER RECORDATION



DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

ORIGINAL G.L.O. NOTES: "Set a quartzite stone 24x10x4 ins. 18 ins. in the ground for the cor to secs 8,9,16 & 17 marked with 4 notches on S & E. edges from which
 A fir 12 ins. diam. bears N.58°30'E. 20 lks. dist. marked T.34N.R.26W.S. 9 B.T.
 A tamarack 12 ins. diam. bears S.64°45'E. 36 lks. dist. marked T.34N.R.26W.S.16 B.T.
 A Fir 6 ins. diam. bears S.51°45'W. 37 lks. dist. marked T.34N.R.26W.S.17 B.T.
 A fir 6 ins. diam. bears N.51°15'W. 33 lks. dist. marked T.34N.R.26W.S.8 B.T."

FOUND: FOUND BRASS CAP MONUMENT SET BY THE B.L.M.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Aug. 1979

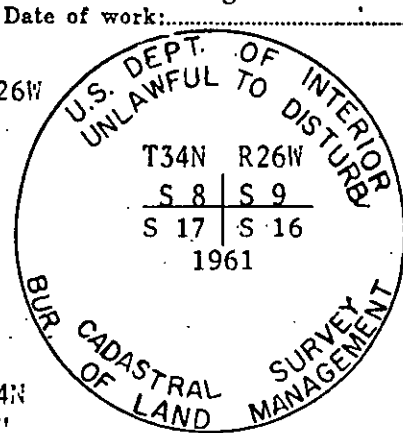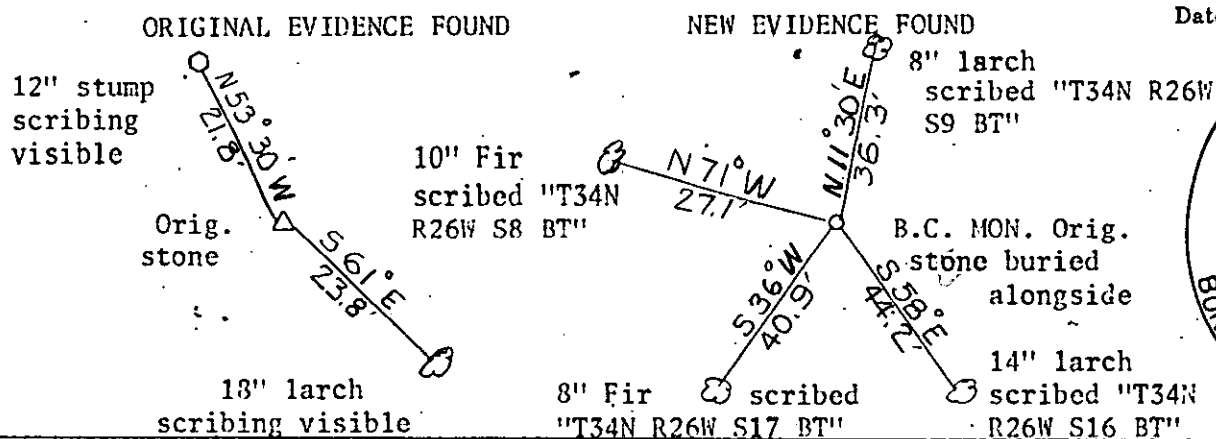

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

Surveyor's Seal

I, JAMES BURTON
 certify that the information shown herein is true and correct.

James Burton
 Signature of Ground Party Chief

I, M. L. HAIGES
 certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

M. L. Haiges
 Signature of Surveyor

2520 S
 Registration Number

DIAGRAM OF CORNER:

N. T34N R26W

8 | 9
17 | 16

= Corner recorded on the sheet

Office of Clerk and Recorder, County of Lincoln
 This "corner record" was filed for record on the 21st day of September, 1979, was noted on the cross-index plat and in assigned page No. 554, in book No. 1
Deane L. Vaughn, by Beth Bell,
 County Official Deputy
 Cross Index No. 59 T. 34 R. 26 Mer.

