

CERTIFIED CORNER RECORDATION

Corner 1/4 Sec. 12&13 T. 34N R. 27W P.M., MT Lincoln County

- I. 1912 G.L.O. Original Record by William C. Perkins: Set a shale stone, 16x10x10 ins., 12 ins. in the ground, for 1/4 sec. cor., mkd. "1/4" on the N. face..

Established two bearing trees:


A pine, 10 ins. diam., bears S04°E, 34 lks. dist., mkd. "1/4 S13 BT".
A pine, 16 ins. diam., bears N30°W, 4 lks. dist., mkd. "1/4 S12 BT".

- II. No evidence found of stone monument, at a surveyed position,

from which:

Rotten remains, bears S04°E, 22.4 ft. dist., "1/4 S13 BT" visible.
Rootwad and rotten remains, bears N30°W, 2.6 ft. dist., "S B" visible.

- II. At the corner point, determined by distances-distance intersect from the remains of the original bearing trees, set a 30 ins. long aluminum pipe, 2 1/2 in. diam., 26 ins. in the ground, with a 3 1/2 in. diam. aluminum cap mkd. as shown.

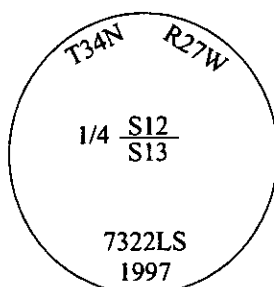


Established two new bearing trees:

A fir, 14 ins. diam., bears S05°E, 31.0 ft. dist., mkd. "1/4 S13 BT".
A fir, 5 ins. diam., bears N44°W, 19.2 ft. dist., mkd. "1/4 S12 BT".

Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East.

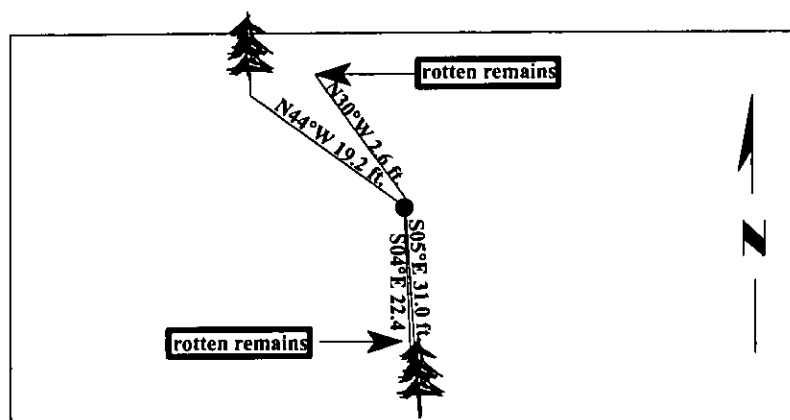

SKETCH OF CORNER

CERTIFICATION	
I, <u>Mark Federman</u>	certify the information shown herein is true and correct.
I, <u>Alvah F. Hughes</u>	certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)
Date: <u>10/08/97</u>	Signature of Surveyor & Seal
Reg. No.: <u>7322LS</u>	
Employer: <u>U.S. FOREST SERVICE</u>	

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 12-26-97 was noted on the cross-index plat and is assigned page No. 10013 in book No. _____

Coral M. Cummings
County Official

Sec. 12

• - corner this sheet