

CERTIFIED CORNER RECORDATION

Corner 1/4 Sec. 13&24 T. 34N R. 27W P.M., MT Lincoln County


- I. 1912 G.L.O. Original Record by William C. Perkins: Set a shale stone, 18x10x6 ins., 14 ins. in the ground, for 1/4 sec. cor., mkd. "1/4" on the N. face..

Established two bearing trees:

A spruce, 10 ins. diam., bears S22°E, 12 lks. dist., mkd. "1/4 S24 BT".
A spruce, 6 ins. diam., bears N05°W, 8 lks. dist., mkd. "1/4 S13 BT".

- II. No evidence found of stone monument or the original bearing trees, as the corner position falls in a 1960's logged unit.

- II. At the corner point, set by single proportion, a 30 ins. long aluminum pipe, 2 1/2 in. diam., 26 ins. in the ground, with a 3 1/2 in. diam. aluminum cap, surrounded with a mound of stone, mkd. as shown.




Established two new bearing trees:

A larch, 5 ins. diam., bears N45°E, 9.5 ft. dist., mkd. "1/4 S13 BT".
A larch, 5 ins. diam., bears S63°E, 7.5 ft. dist., mkd. "1/4 S24 BT".

Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East.

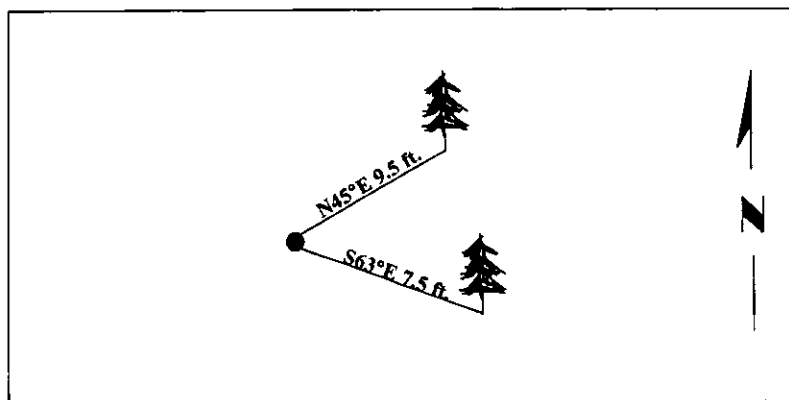

SKETCH OF CORNER

CERTIFICATION	
I, <u>Mark Federman</u>	certify the information shown herein is true and correct.
<i>Mark Federman</i>	
I, <u>Alvah F. Hughes</u>	certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act", (70-22-101, et seq., M.C.A.)
<i>Alvah F. Hughes</i>	
Date: <u>10/21/97</u>	Signature of Surveyor & Seal
Reg. No.: <u>7322LS</u>	
Employer: <u>U.S. FOREST SERVICE</u>	

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 12-26-97 was noted on the cross-index plat and is assigned page No. 10023 in book No. _____

Carol M. Cumming
County Official

Sec. 13

● - corner this sheet