

CERTIFIED LAND CORNER RECORDATION

Corner for Sections 1, 2, 11, and 12 of Twp. 34 N., R. 29 W., M.P.M.

Original DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)
 1912 GLO notes Vol. 6501 Page 11, 12 T34N R 29W Lincoln County, Mont.
 Corner Desc. Slatestone 18"x10"x8", 12" in grd. mkd. W/5 notches on south and 1 notch on E edge.
 5" Birch bears N11°W, 28lks., 6" Fir Bears N32°E 23 lks, mkd T34N R29W S1BT
 (Above mkd. T34N R29W S2BT) 6" Fir bears S72°E 30lks. mkd T34N R29W S12BT
 6" Aspen bears S21°W 11 lks. mkd T34N R29W S11 BT
 Sept. 20, 1966 found NE & SE bearing trees-NE Tree is now a 10" snag 12' high- partially legible*(unmistakeable) SE BT-blaze entirely overgrown- scribing illegible. Found original stone at bearings and distances reported- Aspen and Birch bearing trees long gone. Found A Fir NE of Cor. had been blazed years ago. This blaze chopped out and tagged with STD BT sign 1959- No evidence that this was a B T course and distance to corner not shown. This corner is on steep W. slope at S. edge of small patch of trees extending into slide rock-e (continued on opposite side of this sheet)

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: 20/9/66

We set a Std Brass cap Mon. marked T34N R29W
 2 1
 in a large mound of stone 11 12
 From which orig. BT-now a 11" Fir 1966
 Bears S72°E 20'-Tagged with Std BT sign
 A 9" Fir bears N53°E mkd S 1 BT and tagged- an 11" Fir bears S65°E
 Mrkd S 12 BT- tagged
 Did not mark new Bts in Secs 2& 11
 Set a Std Brass cap Mon. mkd as shown

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
 (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

~ See other side ~

Surveyor's Seal

Jack Ninneman

I, _____
 certify that the information shown herein is true and correct.


Jack Ninneman
 Signature of Ground Party Chief

I, Jack Ninneman
 certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Jack Ninneman
 Signature of Surveyor

DIAGRAM OF CORNER:

N.

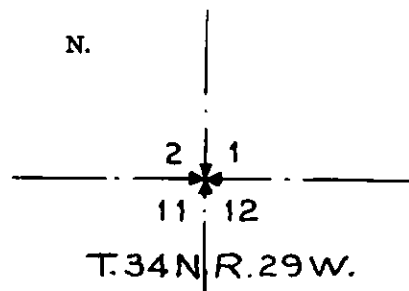

✱ = Corner recorded on the sheet

Mont. 534 BS

Registration Number

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 5th day of January 1967, was noted on the cross-index plat and is assigned page No. 64, in book No. 1


ELEANOR L. VAUGHN, By: *Eleanor L. Vaughn*
 County Official Deputy.

(Found Continued from otherside)

Corner is near top of Rock slide-original stone was completely Buried- We found it only from BT measurements.

We set a standard brass capped monument marked thus:
in a large mound of stone

T.34 N. R.29 W.
2 | 1
11 | 12
1966

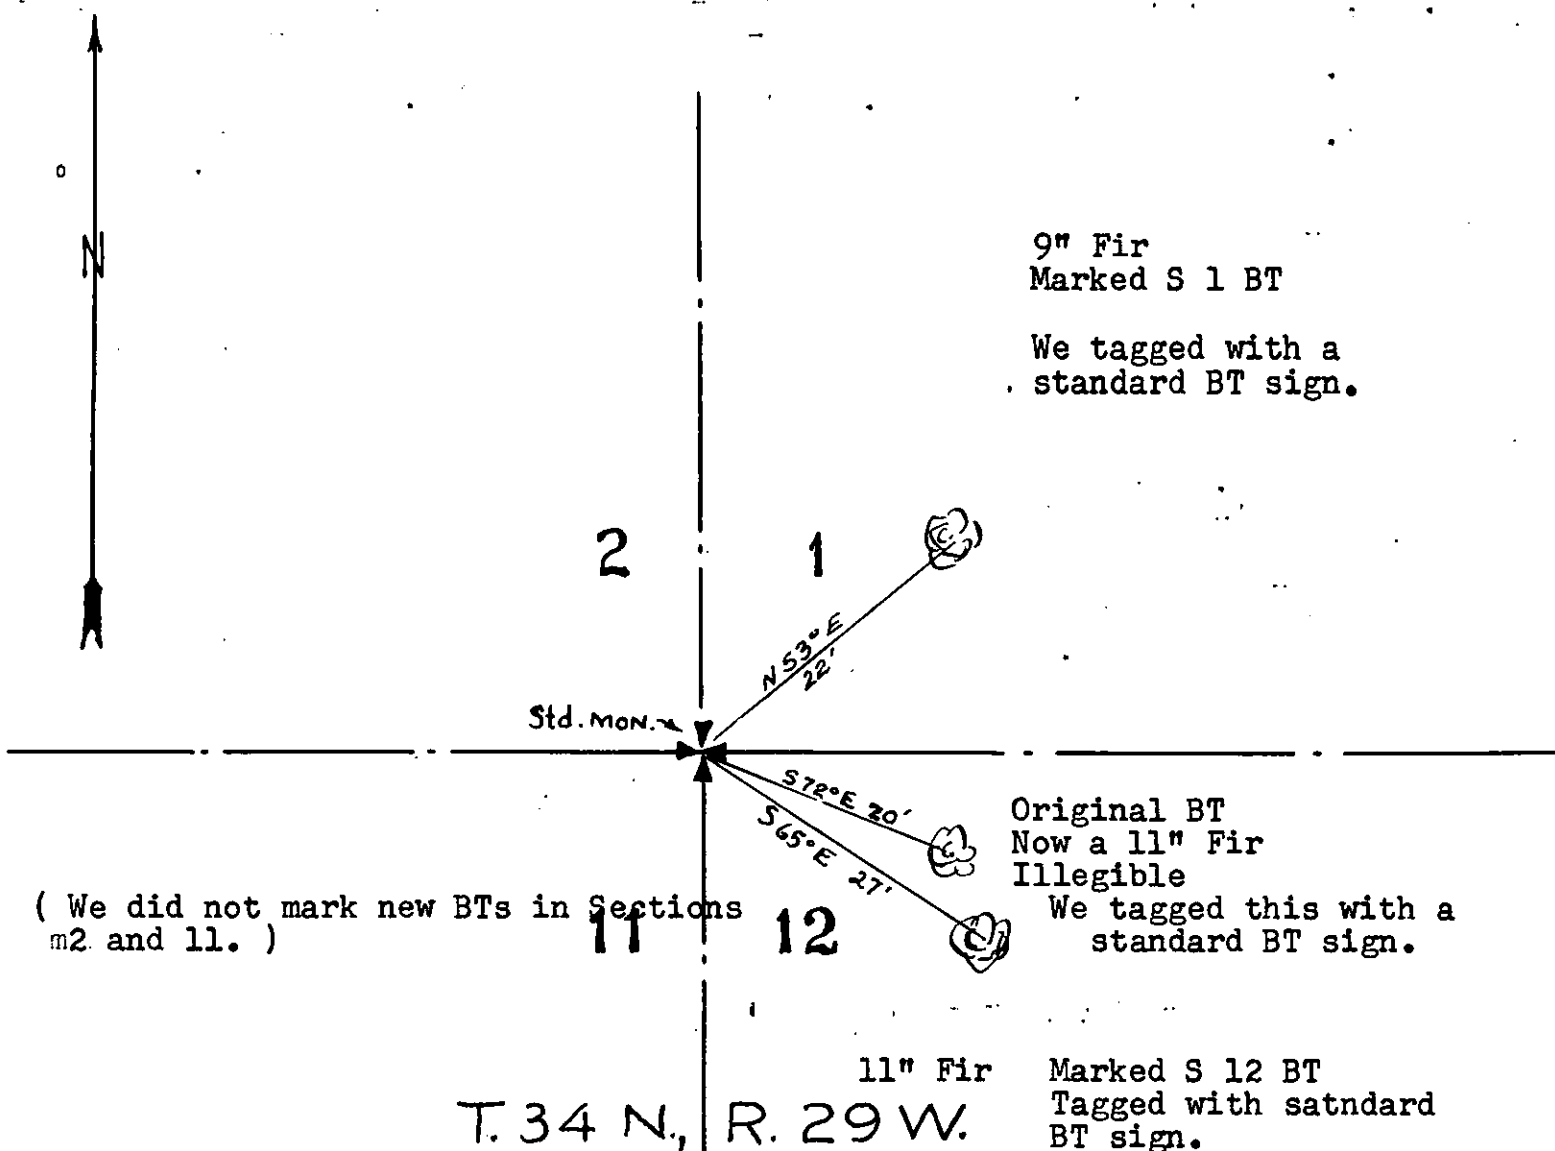

T.34 N., R. 29 W.

STATE OF MONTANA
COUNTY OF LINCOLN
By *Wm. H. Carter* Deputy
Filed by *Wm. H. Carter*
A. D. 1967
day of *May*