

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner S 1/4 S31 T. 34 N. R. 31 W. P.M.M. Lincoln County


I. 1904 G.L.O. record by G. A. Fessenden and R. Y. Lyman: "Set a slate stone, 24x8x5 ins., 18 ins. in the ground, for 1/4 sec. cor., marked 1/4 on N face; from which

A pine, 10 ins. diam., bears S55° E, 18 lks. dist., marked 1/4 S6 BT.
A fir, 8 ins. diam., bears N15 1/2 W, 12 lks. dist., marked 1/4 S31 BT."

II. Found stone laying on ground, 20x6x5 ins., marked 1/4 on one face; from which

A western white pine, 20 ins. diam., bears S55° E, 11.9 ft. (18 lks.) dist., healed face.
A downed fir, 7 ins. diam., bears N15 W, 7.9 ft. (12 lks.) dist., mkd. 1/4 S31 BT.

III. From original bearing tree evidence; set an aluminum pipe, 2 1/2 ins. diam., 30 ins. long, 26 ins. in the ground with 3 1/4 ins. diam., U.S.D.A., Forest Service, aluminum cap marked as shown:





from which, I marked one new bearing tree:

An alpine fir, 7 ins. diam., bears N30° W, 36.5 ft. dist., marked 1/4 S31 BT.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Bury original stone alongside new aluminum monument.

Magnetic Declination: 20° East

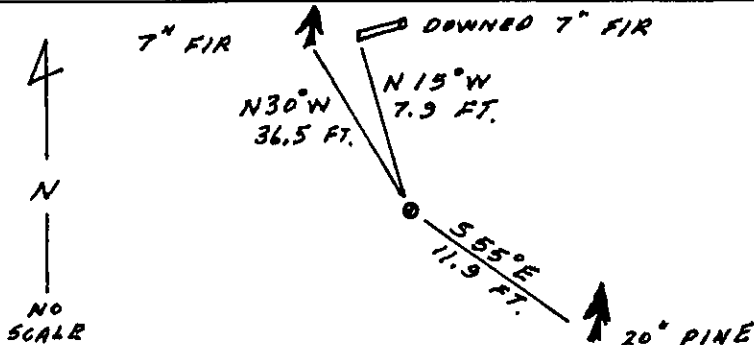

SKETCH OF CORNER

CERTIFICATION

I, Steve A. Boyer
certify the information shown herein is true and correct.
Steve A. Boyer
Signature of Group Party Chief

I, Ronald A. Pearson
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)
Ronald A. Pearson
Signature of Surveyor & Seal

Date: 7/28/92 Reg. No. 9008 LS
Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Aug 13, 1992 was noted on the cross-index plat and is assigned page No. 5080, in book No. Coral M. Cummings


County Official V

Z-03

34 N

31 W

Cross Index No. _____ T. _____ R. _____ PMM



• - corner this sheet