


INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 3 of HES 413 T. 34 N. R. 33 W. P.M.M. Lincoln County

- I. 1915 H.E.S. original record by E. R. Johnson: Set a sandstone 30 by 10 by 10 ins., 20 ins. in the ground, mkd. 3 HES 413 on NE face, and a cross on top for the exact corner point, from which
- A cross on a cedar 10 ins. dia., bears N34°55'W, 32 lks. (21.12 ft.) dist.
- A cross on a fir 12 ins. dia., bears N11°02'E, 54 lks. (35.64 ft.) dist.
- Each blazed and scribed 3 HES 413 BT.
- Raised a mound of earth, 4 ft. base, 2 ft. high, NE of corner.
- II. Found a cedar, 14 ins. dia., mkd. 3 HES 413 BT.
- Position for stone monument and fir BT falls in a skid road.
- III. At position determined by record bearing and distance from found original BT, set a 2 1/2 ins. dia. by 30 ins. long aluminum pipe, 24 ins. in the ground, with aluminum cap mkd. as shown



Established one new bearing tree

A larch, 12 ins. dia., bears S4°E, 39.6 ft. dist., mkd. 3 HES 413 BT.

Bury original stone alongside pipe monument.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, N5°W, 5 ft.

Magnetic declination: 20° East.

CERTIFICATION

I, Kevin A. Todd

certify the information shown herein is true and correct.

Kevin A. Todd
Signature Ground Party Chief


I, Alvah F. Hughes

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah F. Hughes
Signature of Surveyor & Seal
7322 LS

Date: 1/8/91 Reg. No. 7322 LS

Employer: U.S. FOREST SERVICE

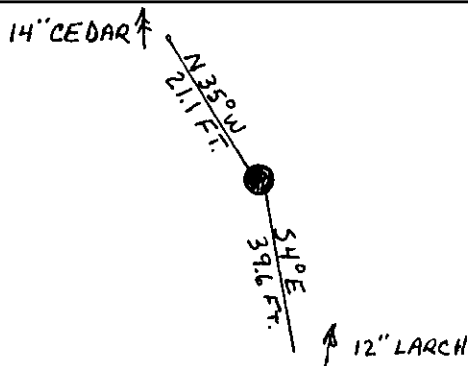

SKETCH OF CORNER

Office of Clerk and Recorder, County of Lincoln. This "corner

record" was filed for record on 1-10-91

was noted on the cross-index plat and is assigned page No. 4474, in

book No. _____


Coral M Cummings by Bill Backoff
County Official

3 HES 413

34 N 33 W

Cross Index No. _____ T. _____ R. _____ P.M.M.

Sec. 16



• - corner this sheet