

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 14 of HES 734 T. 34 N. R. 33 W. P.M.M. Lincoln County

- I. 1917 HES 734 original record by E. R. Johnson: "Establish cor. No. 14 of this survey as follows:
Set a small stone, marked with a cross (X) under a slatetone 26x8x6 ins., 16 in the ground,
marked 14 HES 734 on NE face and a cross (x) on top for exact corner point, from which

A cross (x) on a larch tree, 12' ins. dia., bears $S62^{\circ}45'E$, 107 links distant.

A cross (x) on a larch tree, 10 ins. dia., bears $S47^{\circ}30'E$, 145 links distant; each blazed
and scribed 14 HES 734 BT.

Raise a mound of earth 4 ft. base, 2 ft. high, NE of corner."

1980 C.O.S. No. 769 by J. H. Ninneman, Reg. No. 4661 S: "Record Location of stone monument
corner of H.E.S. No. 734"

- II. Found a firmly set stone, 8x6 ins., mkd. 14 HES 734 on NE face, from which

A mound of stone, NE of corner.

- III. Established two new bearing trees:


A larch, 10 ins. dia., bears $S45^{\circ}W$, 11.3 ft. dist., marked 14 HES 734 BT.

A fir, 9 ins. dia., bears $N26^{\circ}W$, 25.1 ft. dist., marked 14 HES 734 BT.

Painted red bands around the bearing trees and attached "Land Survey Monument" and "Bearing Tree"
signs.

Set a 6 ft. galvanized steel guard post with "Land Survey Marker" and "Property Boundary"
decals, $N17^{\circ}W$, 4.5 ft. dist. from corner.

Magnetic declination: 20° East

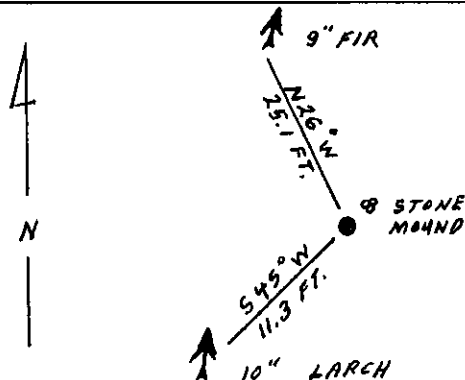

SKETCH OF CORNER

CERTIFICATION

I, Kenneth R. Kern

certify the information shown herein is true and correct.

Kenneth R. Kern
Signature Ground Party Chief

I, Ronald A. Pearson

certify that this Corner Record correctly represents work performed
by me or under my direction in compliance with the "Corner
Recordation Act" (70-22-101, et seq., M.C.A.)

Ronald A. Pearson
Signature of Surveyor & Seal


Date: 12/30/91 Reg. No. 9008LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner
record" was filed for record on Jan 16, 1992
was noted on the cross-index plat and is assigned page No. 4636, in
book No. _____

Coal. Lm. Cummings
by [Signature]
14 HES 734 34 N 33 W
Cross Index No. _____ T. _____ R. _____ PMM

Sec. 27



• - corner this sheet