

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

5 of HES 1063

4 of HES 740

 Corner _____ T. 34 N. R. 33 W. Lincoln County

- I. 1917 HES 740 record by Elmer R. Johnson: "Set for Cor. No. 4, a small stone marked with a cross(X) under a feldspar stone 24x10x6 ins., 14 ins. in the ground, marked 4 H.E.S. 740 on SE face and a cross (x) on top for exact corner point."

from which:

A cross (x) on a larch tree 24 ins. diam., bears $N54^{\circ}15'E$ 83 lks. dist.A cross (x) on a larch tree 15 ins. diam., bears $N23^{\circ}W$, 125 lks. dist; each blazed and scribed 4 HES 740 B.T.

Raise a mound of earth 4 ft. base, 2 ft. high, SE of the corner.

1921 HES 1063 record by Grant Higgins: To Cor. No. 4 of HES 740 (patented) which is a feldspar stone, 10x10x6 ins. diam., above the ground, marked and witnessed as described by the surveyor general. I adopt this Cor. for Cor. No. 5 of this survey and mark it 5 HES 1063 on SW face.

from which:

No bearing trees available, therefore dig pits 24x24x12 ins. crosswise on this and succeeding course, 7 ft. dist..

Raise a small mound of earth, 4 ft. base, 2 ft. high, SW of corner.

- II. Found a firmly set stone 12x5 ins., protruding 6 ins. out of the ground, mkd. 4 HES 740 and 5 HES 1063 on SW face.

from which:


A mound of earth 3 ft. base, 1 ft. high, SW of stone.

- III. Established two new bearing trees:

A larch 8 ins. diam., bears $N49^{\circ}E$, 33.9 ft. dist. mkd. 5 HES 1063 B.T.

A spruce 8 ins. diam., bears East, 16.7 ft. dist. mkd. 5 HES 1063 B.T.

Painted red bands around the bearing trees and attached "Land Survey Monument" and "Bearing Tree" signs. Set a galvanized steel gaurd post with "Land Survey Marker" and "Property Boundary" decals, North, 3 ft.

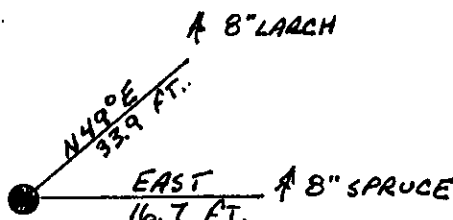Magnetic declination: 20° East

SKETCH OF CORNER

CERTIFICATION

I, Kevin A. Todd
certify the information shown herein is true and correct.

Kevin A. Todd
Signature Ground Party Chief

I, Ronald A. Pearson
certify that this Corner Record correctly represents work performed
by me or under my direction in compliance with the "Corner
Recordation Act" (70-22-101, et seq., M.C.A.)

Ronald A. Pearson
Signature of Surveyor & Seal

Date: 11/16/92 Reg. No. 9008LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner
record" was filed for record on 12-7-92
was noted on the cross-index plat and is assigned page No. 5126, in
book No. _____ Coral M. Cummings

County Official


5 HES 1063

34 N

33W

Cross Index No. _____ T. _____ R. _____ PMM

Sec. . 26

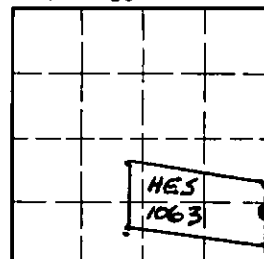

• - corner this sheet