


CERTIFIED CORNER RECORDATION

Corner C-E 1/16 T. 35N R. 27W P.M.M. Lincoln County


1. Set 3 1/4" USDA Forest Service Cadastral aluminum cap on 25"X 5/8" rebar that has been stamped as shown.



2. A 6" Douglas Fir bearing S 02° W at a distance of 18.6 feet and scribed (C-E 1/16 S4 BT).
A 8" Douglas Fir bearing S 31° E at a distance of 54.1 feet and scribed (C-E 1/16 S4 BT).

3. Set steel post with Land Survey Marker and Property Boundary stickers bearing East at a distance of 3.0 feet from corner.

Set steel post with Land Survey Marker and Property Boundary stickers bearing South at a distance of 3.0 feet from corner.

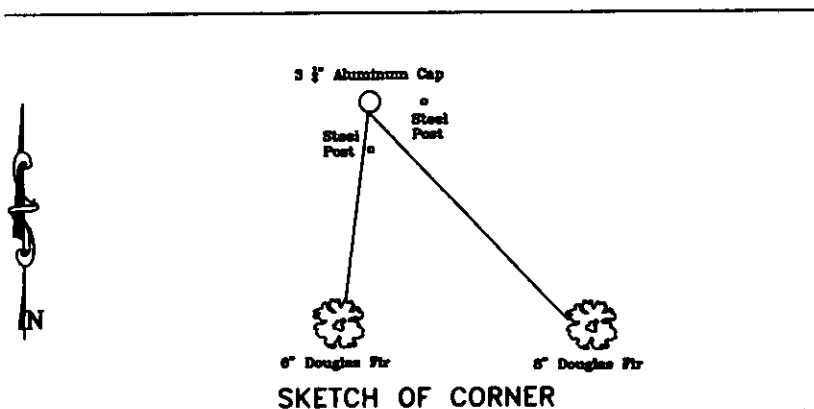

CERTIFICATION

Roger Miller
I certify the information shown herein is true and correct.
ROGER MILLER
Signature Ground Party Chief

Scott L. Toldness
I certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)
Scott L. Toldness
Signature of Surveyor & Seal

Date: 9/04/08 Reg. No. 14744 LS
Employer: Glahe & Associates Inc.

Office of Clerk and Recorder, County of Lincoln . This "corner

record" was filed for record

was noted on the cross-index

book No. _____

214202 BOOK: CCR CC&R'S
STATE OF MONTANA LINCOLN COUNTY

RECORDED: 09/08/2008 11:55 KOI: CC&R'S

TAMMY D. LAUER CLERK AND RECORDER

FEE: \$0.00

TO: FILED

BY Tammy D. Lauer

Cross Index No. C-12 T. 35N R. 27W PMM

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

Sec.	4

• corner this sheet