

INSTRUCTIONS

1. Original and subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Cor. No. 6 H.E.S. 337 T. 35 N. R. 27 W. P.M.M. Lincoln County
(Located in Sec. 2)

ORIGINAL RECORD U.S.D.A. 1915

Set for Cor. No. 6, a limestone, 24x10x4 ins. 14 ins. in the ground, mkd. 6 HES 337 on the N.E. face, and a cross (x) on top for the exact corner point, from which

A cross (x) on a larch, 16 ins. diam., bears N 6° E, 42 lks. dist.

A cross (x) on a Larch, 10 ins. diam., bears N 65° 50' W, 36 lks. dist.

each blazed and scribed 6 HES 337 BT. Raise a mound of earth, 4 ft. base, 2 ft. high, NE. of Cor.

BLM REMONUMENTATION 1960

Cor. No. 6 of H.E.S. No. 337, monumented with a limestone, 24x10x4 ins., loosely set and mkd. 6 HES on the N.E. face, and witnessed by the remains of the original bearing trees.

At the corner point, Set an iron post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, in concrete, with brass cap mkd.

T35N R27W
HES 337
S 2 6
1960

from which the remains of the original bearing trees:

A stump, 16 ins. diam., bears N 6° E, 42 lks. dist., mkd. 6 HES 337 BT. (Rec)

A larch, 11 ins. diam., bears N 65 1/2° W, 36 lks. dist., mkd. with an overgrown blaze. (Record)

The new bearing trees:

A fir, 10 ins. diam., bears N 41° W, 132 lks. dist. mkd. 6 HES 337 BT.

A fir, 7 ins. diam., bears N 20° W, 96 lks. dist., mkd. 6 HES 337 BT.


Bury the original stone alongside and raise a mound of stone, 3 ft. base, 2 ft. high, N.E. of the iron post.

EVIDENCE FOUND

Found a BLM brass cap, 4 ins. above the ground, mkd as shown above, from which:

A stump, 16 ins. diam., bears NORTH (Rec. N 6° E), 28.5 ft. dist., scribing visible. (USDA 1915 BT)

A fir (Rec. larch) 18 ins. diam., bears N 65 1/2° W, 23.6 ft. dist. mkd. with an overgrown blaze. (USDA 1915 BT)

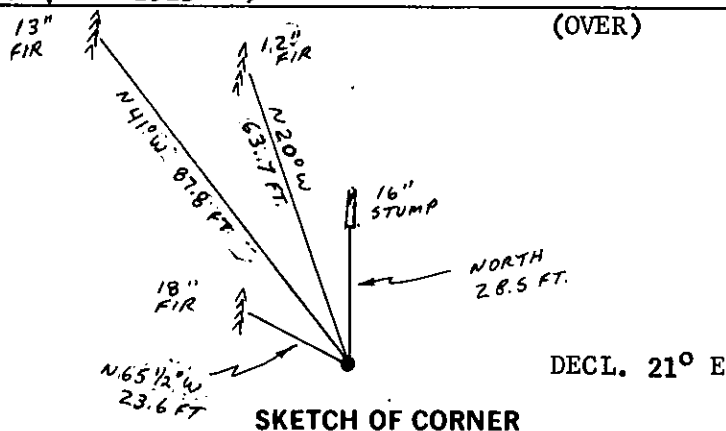

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Chief

Philip A. Helps

I, _____
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Signature of Surveyor & Seal

Date: 9/87 Reg. No. 4739 S


Employer: F & H Land Surveying, Whitefish

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the October 6 day of 1987, was noted on the cross-index plat and is assigned page No. 3667, in book No. _____

County Official Janet B. Sugilby Deputy

Cross Index No. _____ T. 35 N R. 27 W PMM

Sec. 2

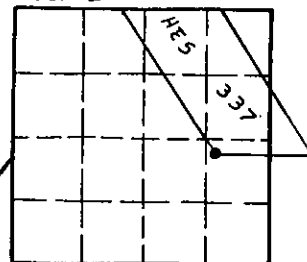

• - corner this sheet

A fir, 13 ins. diam., bears N 41° W, 87.8 ft. dist., scribing visible. (BLM 1960 BT)

A fir, 12 ins. diam., bears N 20° W, 63.7 ft. dist., mkd. with an overgrown blaze. (BLM 1960 BT)

A mound of stone N.E. of the brass cap.

CORNER PERPETUATION

Set a galvanized steel guard post with a Property Boundary decal and a Survey Monument decal, 2 ft. East of the brass cap. Painted red bands around the bearing trees and painted the scribing and blazing. Attached bearing tree signs and attached Land Survey Monument signs.