

INSTRUCTIONS

1. Original and subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner C.C. For Sec. 1 and Sec. 2 T. 35 N R. 27 W P.M.M. Lincoln County

ORIGINAL RECORD G.L.O. 1913

Set a sandstone 12x12x4 ins., 8 ins. in the ground, for closing cor. of secs. 1 and 2, mkd. CC of the S., with 1 groove on the E. and 5 grooves on the W. face, from which:

A fir, 30 ins. diam., bears S 68° E, 99 lks. dist., mkd. T35N R27W S 1 BT.
A spruce, 5 ins. diam., bears S 36° W, 59 lks. dist., mkd. T35N R27W S 2 BT.

B.L.M. REMONUMENTATION 1960

The closing corner of secs. 1 and 2, monumented with a limestone, 12x12x4 ins., firmly set and mkd. CC on the S. face and with 1 notch on the E. and 5 notches on the W. edges, and witnessed by the original bearing trees/

At the corner point, Set an iron post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, in concrete, with brass cap mkd.

T36N R27W

from which the remains of the original bearing trees:

S 35

S 2 S 1

T35N R27W

C C

1960

A stump, 30 ins. diam., bears S 68° E, 99 lks. dist., mkd. T35N R27W S 1 BT.
(Record)

A spruce, 28 ins. diam., bears S 36° W, 59 lks. dist., mkd. with an overgrown blaze. (Record)

The new bearing tree:

A larch, 8 ins. diam., bears S 48° E, 117 lks. dist., mkd. T35N R27W S 1 CC BT.

Bury the original stone alongside and raise a mound of stone, 3 ft. base, 2 ft. high, S. of the iron post.


EVIDENCE FOUND

Found a B.L.M. brass cap, flush with the ground, and mkd. as shown above, from which:

A stump, 26 ins. diam., bears S 68° E, 65.8 ft. dist., with scribing visible. (GLO 1913 BT)
(Note: There is also scribing on the N.E. face of the stump for the cor. of secs. 35 and 36)

A spruce, 24 ins. diam., bears S 36° W, 38.4 ft. dist., mkd. with an overgrown blaze.
(GLO 1913 BT)

A larch, 15 ins. diam., bears S 48° E, 77.4 ft. dist., mkd. with an overgrown blaze. (BLM 1960 BT)
(OVER)

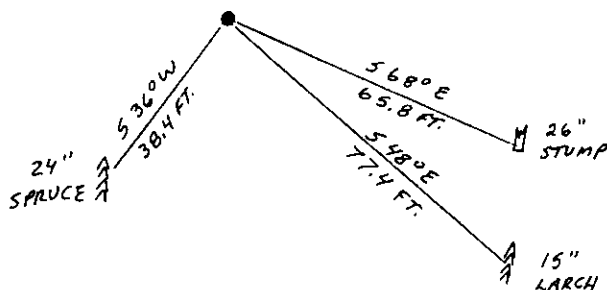

DECL. 21° E

SKETCH OF CORNER

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Philip A. Helps

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-2110, et seq., M.B.A.)

Signature of Surveyor & Seal


Date: 9/87 Reg. No. 4739 SEmployer: F & H Land Surveying, Whitefish

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the October 6 day of 1987, was noted on the cross-index plat and is assigned page No. 3470, in book No. _____

County Official

Cross Index No. A - 21 T. 35 N R. 27 W PMM

Sec. 2

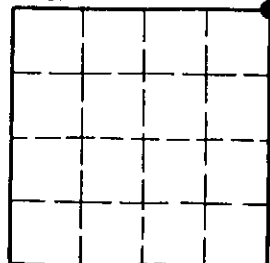

• - corner this sheet

(CONT'D)

Found a badly deteriorated mound of stone S. of the brass cap.

CORNER PERPETUATION

Set a galvanized steel guard post with a Survey Marker decal 3 ft. East of the brass cap. Painted red bands around the bearing trees and painted the blazing and scribing. Attached bearing tree signs and attached Land Survey Monument signs.