

INSTRUCTIONS

1. Original and subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner N.E. Cor. Section 10 T. 35 N. R. 27 W. P.M.M. Lincoln County

ORIGINAL RECORD G.L.O. 1913

Set a limestone, 18x8x6 ins. 12 ins. in the ground, for cor. of secs. 2,3,10, and 11, mkd. with 5 notches on the S. and 2 notches on the E. edge, from which
 A fir, 7 ins. in dia., bears N 37° E, 21 lks. dist., mkd. T35N R27W S 2 BT.
 A fir, 8 ins. in dia., bears S 72 1/2° E, 26 lks. dist., mkd. T35N R27W S 11 BT.
 A fir, 5 ins. in dia., bears S 67 1/4° W, 27 lks. dist., mkd. T35N R27W S 10 BT.
 A tamarack, 10 ins. in dia., bears N 33° W, 20 lks. dist., mkd. T35N R27W S 3 BT.


EVIDENCE FOUND

The cor. of secs. 2,3,10, and 11, monumented with a limestone, 18x8x6 ins., firmly set, mkd. with 5 notches on the S. and 2 notches on the E. edge, and witnessed by the original bearing trees;
 A stump hole, bears N 37° E, 13.9 ft. dist., with a fallen fir, 8 ins. dia., lying alongside, scribed T35N R27W S 2 BT.
 A fir, 17 ins. dia., bears S 72 1/2° E, 17.5 ft. dist., mkd. with an overgrown blaze.
 A larch, 12 ins. dia., bears N 33° W, 19.5 ft. dist., mkd. with an overgrown blaze. (GLO Rec. 20 lks. = 13.2 ft.)
 The bearing tree to the S.W. was searched for and not fnd. (Rec. call falls in roadway.)

CORNER PERPETUATION

At the corner point:

Set an aluminum pipe, 2 1/2 ins. dia., 30 ins. long, 24 ins. in the ground, with 3 1/4 ins. aluminum cap mkd:




from which new bearing trees:

A fir, 11 ins. in dia., bears N 35° E, 9.8 ft. dist., mkd. T35N R27W S 2 BT.

A fir, 12 ins. in dia., bears S 37° W, 56.6 ft. dist., mkd. T35N R27W S 10 BT.

bury the original stone alongside the aluminum pipe.

Set a galvanized steel post with a Survey Marker decal, 3 ft. north of the aluminum cap. Painted red bands around the bearing trees and painted the scribing and blazing. Attached bearing tree signs and attached Survey Monument signs.

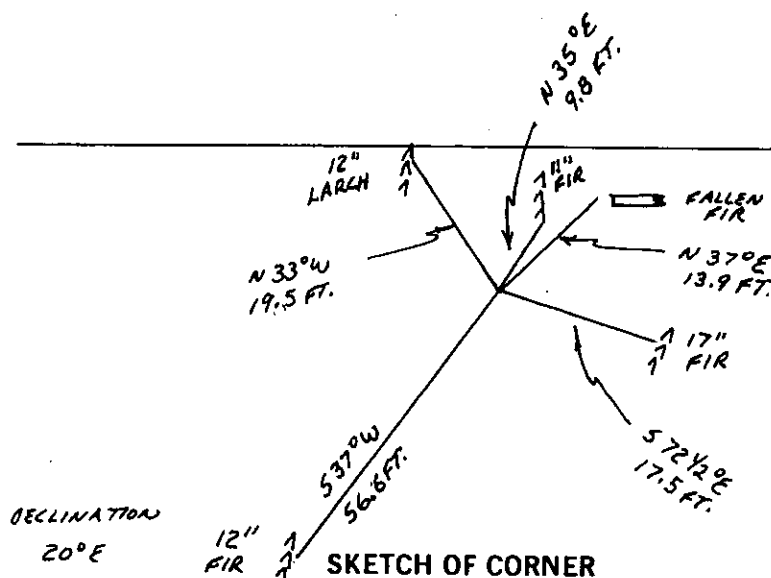

CERTIFICATION

I, _____
 certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Philip A. Helps
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Signature of Surveyor & Seal

Date: 7/87 Reg. No. 4739 S


Employer: F & H Land Surveying, Whitefish

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the October 6 day of 1987 was noted on the cross-index plat and is assigned page No. 3687, in book No. _____

County Official Grant B. Sugel by Bill Braddock

Cross Index No. E - 17 T. 35 N. R. 27 W. P.M.M.

Sec. 10



• corner this sheet