

INSTRUCTIONS

1. Original and subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner E. 1/4 Cor. Section 10 T. 35 N. R. 27 W. P.M.M. Lincoln County

ORIGINAL RECORD G.L.O. 1913

Set a limestone, 14x10x4 ins. 10 ins. in the ground, for 1/4 sec. cor., mkd. 1/4 on W. face, from which

A fir, 4 ins. in dia., bears N 44° E, 26 lks. dist., mkd. 1/4 S 11 BT.

A fir, 5 ins. in dia., bears S 10 1/2° W, 46 lks. dist., mkd. 1/4 S 10 BT.

EVIDENCE FOUND

The 1/4 sec. cor. of secs. 10 and 11, monumented with a limestone, 14x10x4 ins., firmly set, mkd. 1/4 on W. face, and witness by an original bearing tree:

A stump hole, bears N 44° E, 17.2 ft. dist., with a fallen fir, 6 ins. in dia., lying alongside, mkd. 1/4 S 11 BT.

The bearing tree to the S.W. was searched for and not fnd. The area was disturbed by a logging operation.

CORNER PERPETUATION

At the corner point:

Set an aluminum pipe, 2 1/2 ins. in dia., 30 ins. long, 24 ins. in the ground, with 3 1/4 ins. aluminum cap mkd:

T35N R27W

from which new bearing trees:

S 10 | S 11

A larch, 6 ins. in dia., bears N 56° E, 31.3 ft. dist., mkd. 1/4 S 11 BT.


1/4

A fir, 10 ins. in dia., bears N 48° W, 58.9 ft. dist., mkd. 1/4 S 10 BT.

1987

bury the original stone alongside the aluminum pipe.

Set a galvanized steel post with a Survey Marker decal, 3 ft. north of the aluminum cap. Painted red bands around the bearing trees and painted the scribing and blazing. Attached bearing tree signs and attached Survey Monument signs.

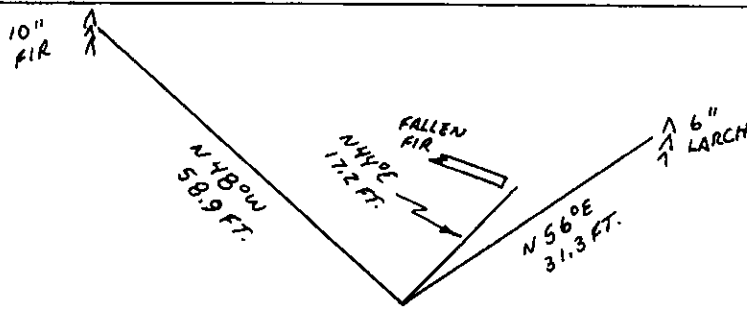

DECLINATION
20° E

SKETCH OF CORNER

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Chief

Philip A. Helps

I, _____
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Signature of Surveyor & Seal

Date: 7/87 Reg. No. 4739 S


Employer: F & H Land Surveying, Whitefish

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the October 6 day of 1987 was noted on the cross-index plat and is assigned page No. 3688, in book No. _____

County Official Janet B. Sugel by Bill Brachoff

Cross Index No. G - 17 T. 35 N. R. 27 W. P.M.M.

Sec. 10



• corner this sheet