

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 2 of HES 573 T. 35 N. R. 27 W. P.M.M. Lincoln County

I. 1919 HES 573 record by W. P. Stephenson: "Established Cor. 2 of this survey as follows:

Set a small stone marked with a cross(x), under an iron post, 2 ins. diam., 36 ins. long, 24 ins. in the ground, with a brass cap marked 2 HES 573 1919 and a point on top for the exact corner point, from which


A cross(X) on a tamarack, 24 ins. diam., bears S68°17'W, 30 lks.(19.80 ft.) dist.

A cross(X) on a fir, 9 ins. diam., bears N75°22'W, 88 lks.(58.08 ft.) dist.

Each blaze and scribed 2 HES 573 BT.

Raise a mound of earth, 4 ft. base, 2 ft. high, West of the corner.

II. Found a 2 ins. diam. iron pipe, 11 ins. out of the ground, with USFS brass cap mkd. as shown.



From which:

A tamarack stump, bears S68°W, 19.8 ft. dist., mkd. 2 HES 573 BT.


Rock mound 2 ft. NW of corner.

III. Established two new bearing trees:

A spruce 9 ins. diam., bears N51°E, 10.8 ft. dist., mkd. 2 HES 573 BT.

A spruce 10 ins. diam., bears S43°E, 15.2 ft. dist., mkd. 2 HES 573 BT.

Painted red bands around the bearing trees and attached "Land Survey Monument" and "Bearing Tree" signs. Set a galvanized steel guard post with "Land Survey Marker" and "Property Boundary" decals, N45°W, 4 ft. Magnetic declination: 20° East

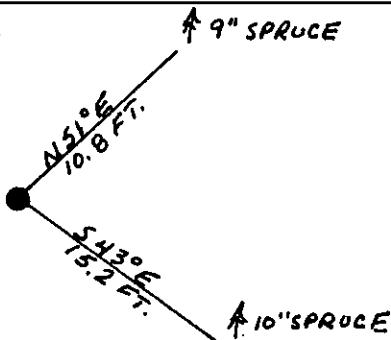

SKETCH OF CORNER

Kenneth Kern
CERTIFICATION

I, Kenneth Kern
certify the information shown herein is true and correct.

Alvah F. Hughes
Signature Ground Party Chief

I, Alvah F. Hughes
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

1/12/92 Signature of Surveyor & Seal 322LS

Date: 1/12/92 Reg. No. 322LS
U.S. FOREST SERVICE

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Jan 28, 1992

was noted on the cross-index plat and is assigned page No. 4676, in

book No. _____

Coral M Cummings by Bill Buckhoff


County Official

2 HES 573

35 N 27 W

Cross Index No. _____ T. _____ R. _____ PMM

Sec. 28



• - corner this sheet