


1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

Corner 4 of HES 573 T. 35 N. R. 27 W. P.M.M. Lincoln County

A cross(X) on a pine, 6 ins. diam., bears S84⁰45'E, 24 lks.(15.84 ft.) dist.
A cross(X) on a pine, 9 ins. diam., bears S51⁰35'E, 46 lks.(30.36 ft.) dist.
Each blaze and scribed 4 HES 573 BT.


II. Found a 2 ins. diam. iron pipe, 9 ins. out of the ground, with USFS brass cap mkd. as shown.



A spruce, 8 ins. diam., bears N75⁰ E, 24.1 ft. dist., 573 BT visible. (No record)
A dead lodgepole pine, 11 ins. diam., bears S46⁰ E, 30.6 ft. dist., mkd. 4 HES 573 BT. (No record)

A spruce, 10 ins. diam., bears S⁰ W, 22.7 ft. dist., mkd. 4 HES 573 BT.

Painted red bands around the bearing trees and attached "Land Survey Monument" and "Bearing Tree" signs.
A carsonite post with "Land Survey Marker" and "Property Boundary" decals, N45° W, 1.6 ft.
Magnetic declination: 20° East

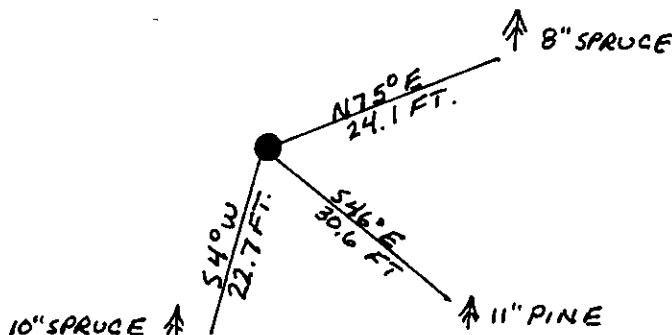

I, Kenneth Kern
 certify the information shown herein is true and correct.
Kenneth R Kern
 Signature Ground Party Chief
 Alvah P. Hughes
 I, _____
 certify that this Corner Record correctly represents work performed
 by me or under my direction in compliance with the "Corner
 Recordation Act" (70-22-101, et seq., M.C.A.)
Alvah P. Hughes
 Signature of Surveyor and Seal
 1/12/92 7322LS
 Date: _____ Reg. No. _____
 U.S. FOREST SERVICE
 REGISTERED

County Official
4 HES 573 35 N 27 W

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors