
CERTIFIED CORNER RECORDATION

Corner C-E-W 1/64 Sec. 20 T. 35N R. 27W P.M., MT Lincoln County

- I. No previous history.
- II. Nothing found.
- III. At the position determined by survey, set a 3/4 in. diam., 30 ins. long alum. rod, 28 ins. in the ground, with a 3 1/4 in. diam. alum. cap mkd. as shown:



Established two new bearing trees:


A fir, 8 ins. diam., bears S85°E, 34.7 ft. dist., mkd. "C-E-W 1/64 S20 BT".

A fir, 7 ins. diam., bears S11°E, 18.8 ft. dist., mkd. "C-E-W 1/64 S20 BT".

Set two 6 ft. steel guard posts with LSM and PB decals: South, 5.0 feet dist., and West, 3.0 feet dist. from monument.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East

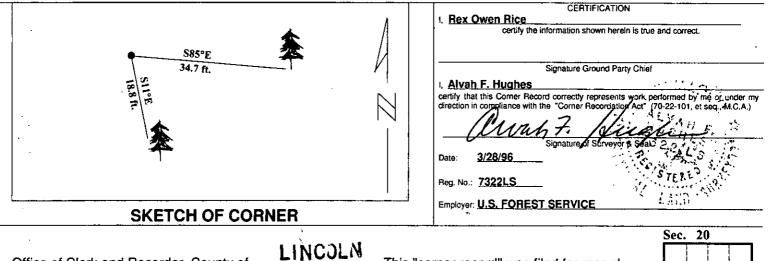

• comer this sheet

oss Index No. P-6-5

T. 35N

^{R.} 27W