


CERTIFIED CORNER RECORDATION

Corner SW 1/16 Sec. 20 T. 35N R. 27W P.M., MT Lincoln County

- I. No previous history.
- II. Nothing found.
- III. At the position determined by survey, set a 3/4 in. diam., 30 ins. long alum. rod, 29 ins. in the ground, with a 3 1/4 in. diam. alum. cap mkd. as shown:



Established two new bearing trees:


A larch, 12 ins. diam., bears N39°E, 20.4 ft. dist., mkd. "SW 1/16 S20 BT".

A larch, 15 ins. diam., bears N79°W, 29.7 ft. dist., mkd. "SW 1/16 S20 BT".

Set two 6 ft. steel guard posts with LSM and PB decals: South, 2.0 feet dist., and East, 1.5 feet dist. from monument.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East

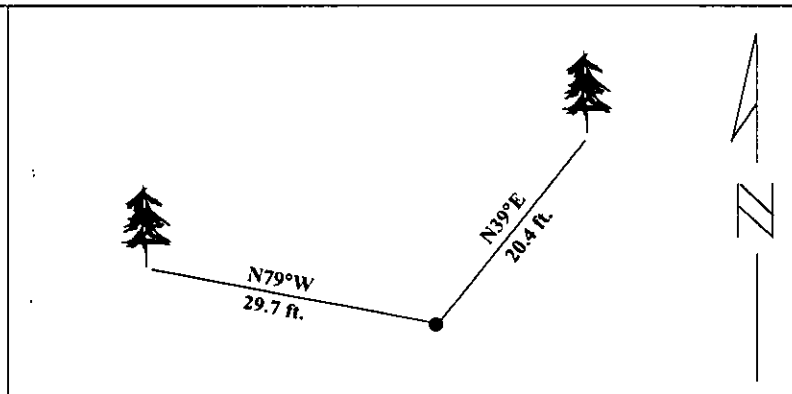

SKETCH OF CORNER

CERTIFICATION	
I, <u>Rex Owen Rice</u> certify the information shown herein is true and correct.	
Signature Ground Party Chief	
I, <u>Alvah F. Hughes</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101; et seq., M.C.A.)	
Signature of Surveyor & Seal	
Date:	<u>3/28/96</u>
Reg. No.:	<u>7322LS</u>
Employer:	<u>U.S. FOREST SERVICE</u>

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on JULY 29, 1997 was noted on the cross-index plat and is assigned page No. 9747 in book No. _____

CORAL M. CUMMINGS

County Official

B, RLB

Sec. 20

• - corner this sheet