
CERTIFIED CORNER RECORDATION

Corner SE 1/16 Sec. 34 T. 35N R. 27W P.M., MT Lincoln County

- I. No previous history.
- II. Nothing found.
- III. At the position determined by survey, set a 3/4 in. diam., 20 in. long alum. rod, 17 ins. into a fir stump, with a 3 1/4 in. diam. alum. cap mkd. as shown.




Established two new bearing trees:

A fir, 10 ins. diam., bears N25°E, 29.3 ft. dist., mkd. "SE 1/16 S34 BT". A fir, 9 ins. diam., bears S82°E, 23.4 ft. dist., mkd. "SE 1/16 S34 BT".

Set a 6 ft. steel guard post with LSM and PB decals, S., 4 feet from monument.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East

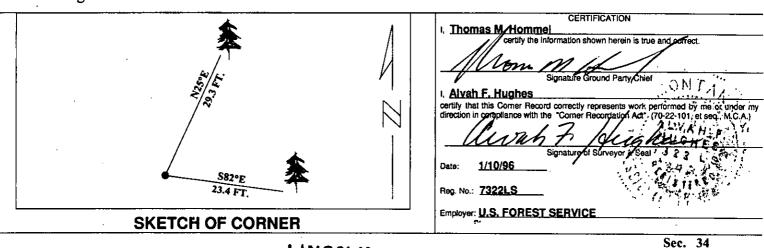

Cross Index No. Y-1

^{1.} 35N

^{R.} 27W