

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 5 of HES 348 T. 35 N. R. 31 W. P.M.M. Lincoln County

I. 1915 HES 348 record by Fred E. Thieme: "Set for Cor. No. 5, a small stone marked with a cross(x) under a shale stone 24x16x6 ins. 14 ins. in the ground, marked 5 HES 348 on SE face, and a cross(x) on top for the exact corner point. No bearings available, therefore dig pits 24x24x12 ins. crosswise on this and the succeeding course 7 ft. dist., and raise a mound of stone 4 ft. base, 2 ft. high, SE of corner."

II. Found a 16x5 ins. stone, 12 ins. out of the ground, mkd. 5 HES 348 on South face. Pit 2 ft. diam., 8 ins. deep bears South, 7 ft. dist. Mound of stone 2 ft. base, 1 ft. high SE of corner.

III. Established two new bearing trees:


A spruce, 13 ins. diam., bears S62°W, 51.8 ft. dist., mkd. 5 HES 348 BT.

A subalpine fir, 5 ins. diam., bears N50°W, 30.8 ft. dist., mkd. 5 HES 348 BT.

Painted red bands around the bearing trees and attached "Land Survey Monument" and "Bearing Tree" signs.

Set a galvanized steel guard post with "Land Survey Marker" and "Property Boundary" decals, South, 3 ft.

Magnetic declination: 20° East

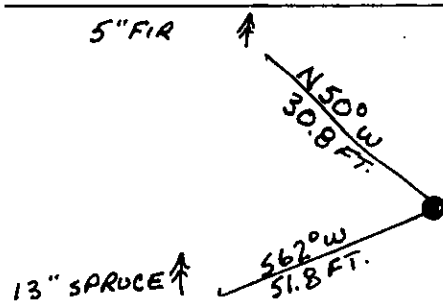

SKETCH OF CORNER

CERTIFICATION

I, Kevin A. Todd
certify the information shown herein is true and correct.

Kevin A. Todd
Signature Ground Party Chief

I, Ronald A. Pearson
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Ronald A. Pearson
Signature of Surveyor & Seal

Date: 1/2/92 Reg. No. 9008 LS

Employer: U.S. FOREST SERVICE


Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Jan 16, 1992 was noted on the cross-index plat and is assigned page No. 4622, in book No. _____

Coral Lynn Cummings
County Official

5 HES 348 35 N 31 W

Cross Index No. _____ T. _____ R. _____ PMM

Sec. 30



• - corner this sheet