

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

2 of HES 342

3 of HES 347, 6 of HES 350

35 N.,

31 W.,

Lincoln

Corner _____ T. _____ R. _____ P.M.M. _____ County

- I. 1915 HES 350 record by Fred E. Thieme: "Set for Cor. No. 6, a small stone marked with a cross(x) under a lime stone 24x14x6 ins. 14 ins. in the ground, marked 6 HES 350 on E face, and a cross(x) on top for the exact corner point. From which

A cross(x) on a lodgepole pine, 9 ins. diam., bears N53°40'E, 31 lks.(20.46 ft.) dist.

A cross(x) on a lodgepole pine, 10 ins. diam., bears S61°0'E, 17 lks.(11.22 ft.) dist.

Each blazed and scribed 6 HES 350 BT.

Raise a mound of earth 4 ft. base, 2 ft. high, NE of corner.

1915 HES 342 record by Fred E. Thieme: "To Cor. No. 2, identical with Cor. No. 6 of unapproved HES 350 a limestone 10x14x6 ins. above ground. I mark this stone for Cor. No. 2, 2 HES 342 of SW face. From which

A cross(x) on a lodgepole pine, 8 ins. diam., bears S49°31'W, 11 lks.(7.26 ft.) dist.

A cross(x) on a lodgepole pine, 9 ins. diam., bears N21°25'W, 18 lks.(11.88 ft.) dist.

Each blazed and scribed 2 HES 342 BT.

1915 HES 347 record by Fred E. Thieme: "To Cor. No. 3, identical with Cor. Nos. 6 and 2 of unapproved HES Nos. 350 and 342, a limestone 10x14x6 ins. above ground. I mark this stone for Cor. No. 3, 3 HES 347 on NW face." Bearing trees used for HES 342 marked 3 HES 347 BT.

- II. Found a stone, 14x5, 4 ins. out of the ground, mkd. 6 HES 350 on East face, 2 HES 342 on SW face and 3 HES 347 on NW face. From which


A lodgepole pine, 13 ins. diam., bears S19°W, 16.3 ft. dist., mkd. 2 HES 342 BT.(No record)

A lodgepole pine, 12 ins. diam., bears N59°W, 17.4 ft. dist., mkd. 2 HES 342 BT.(No record)

Above bearing trees were established by JHN in 1977.(According to found BT signs)

- III. Painted red bands around the bearing trees and attached "Land Survey Monument" and "Bearing Tree" signs.

Set a galvanized steel guard post with "Land Survey Marker" and "Property Boundary" decals, East, 3 ft.
Magnetic declination: 20° East

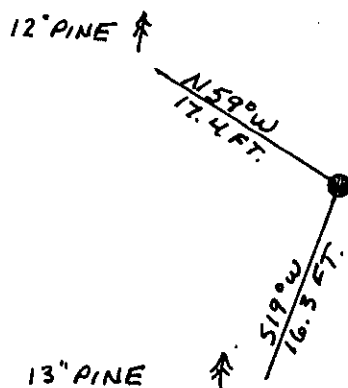

SKETCH OF CORNER

CERTIFICATION

Kevin A. Todd

I, _____ certify the information shown herein is true and correct.

Kevin A. Todd
Signature Ground Party Chief

Ronald A. Pearson

I, _____ certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Ronald A. Pearson
Signature of Surveyor & Seal


12/23/91 Reg. No. 9008 LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Jan 16, 1992 was noted on the cross-index plat and is assigned page No. 4624, in book No. _____

Cross Index No. _____ T. _____ R. _____ PMM

Sec. 19

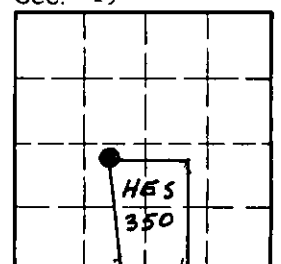

• - corner this sheet