

## INSTRUCTIONS


1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner No. 5 H.E.S. No. 495 35N 32W Lincoln County  
T.    R.    P.M.M.   

1. Original monument description not available.

2. Found: 8" X 10" X 20" stone scribed 1 H.E.S. 274 on NW face and 1 H.E.S. (451 not legible) on the NE face. A 36" Larch stump (which bears N30°E 19.0 feet) scribed 5 H.E.S. 495 and posted.

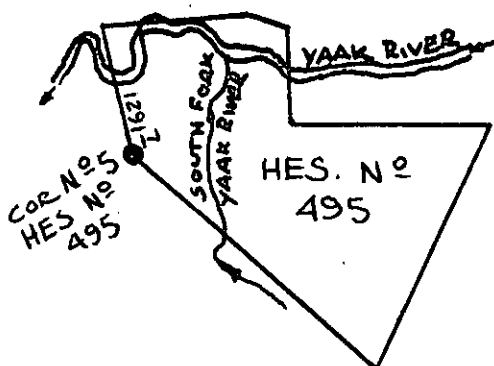

FOUND 8"X10"X20"  
STONE SCRIBED  
1 HES 274 ON  
NW FACE  
1 HES 451 ON  
NE FACE.  
(451 NOT LEGIBLE)

36" LARCH  
STUMP  
SCRIBED &  
POSTED

N30°E  
19.0 FT.

SKETCH OF CORNER

## CERTIFICATION

I, David B. Stanley

certify the information shown herein is true and correct.

David B. Stanley  
Signature Ground Party Chief

I, Jack H. Ninneman

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Jack H. Ninneman  
Signature of Surveyor & Seal

Date: 3/9/82 Reg. No. 4661S

Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the March 11th day of 1982 was noted on the cross-index plat and is assigned page No. 1595, in book No. 1

Eleanor L. Vaughn by Betty L. Conner  
County Official Deputy

35N 32W

Cross Index No.

T.

R.

P.M.M.

Sec. 1

HES 495			
UNSURVEYED			
SECTION			

• corner this sheet