

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner No. 2 H.E.S. No. 1059 T. 35 N., R. 33 W., P.M.M. Lincoln County  
 {Unsurveyed Section 30±} Date of Work: September, 1983

## 1. {a} Original Record {June, 1921}

Place a small stone, marked with a cross {x} under a sandstone, 26 X 12 X 8 ins., 16 ins. in the ground, marked 2 HES 1059 on NE. face and a cross {x} on top for the exact corner point.

No bearings available; pits impracticable.

Raise a mound of stone, 4 ft. base, 2 ft. high, NE. of corner.

## {b} Subsequent Record {August, 1921}

Point for listing Cor. No. 2, identical with Cor. No. 2 of H.E.S. No. 1059, which is a sandstone 10 x 12 x 8 ins. above ground, as established on June 20, 1921. Adopted this Cor. for Cor. No. 3 of the Survey of H.E.S. No. 1074 and marked it 3 HES 1074 on SE. face, no bearings available, pits impracticable, raise a mound of stone, 4 ft. base, 2 ft. high, SE. of Corner.

## 2. Evidence found {September, 1983}

Found a 12 x 8 ins. stone, approx. 7 ins. above ground, marked 2 HES 1059 on NE. face and 3 HES 1074 on SE. face and a faint cross {x} on top for the exact corner point.

Found a mound of stone NE. of corner.

Found a mound of stone SE. of corner.

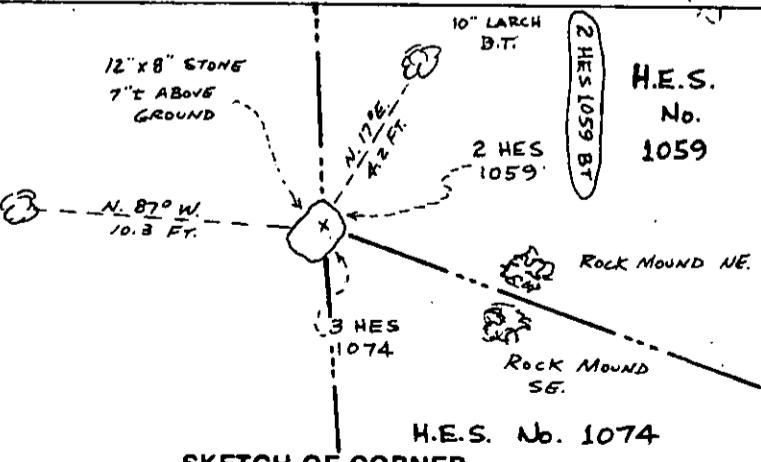

## 3. Perpetuation {September, 1983}

Painted Original Stone Monument marking Corner No. 2 HES No. 1059 red, drive lath and stake alongside with identifying information, from which:

A Larch tree, 9 ins. dia., bears N. 87°W., 10.3 ft. dist.

A Larch tree, 10 ins. dia., bears N. 17°E., 4.2 ft. dist.

Each marked with a cross {x} above a blaze scribed: 2 HES 1059 BT, cross and face of blaze of each painted red with a red ring painted around the trees at cross {x}

 <b>SKETCH OF CORNER</b>	<b>CERTIFICATION</b>	
	1. <u>L.A. Dolezal</u> certify the information shown herein is true and correct.  Signature Ground Party Chief	
2. <u>Melvin D. Lauteren</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22104, et seq., M.L.A.)  Signature of Surveyor & Seal		
Date: <u>9-30-83</u> Reg. No. <u>4232S</u> Employer: <u>Kootenai Engineering, Inc.</u>		

Office of Clerk and Recorder, County of LINCOLN. This "corner record" ± Sec. 30-T35N-R33W-PMM was filed for record on the 3rd day of OCT. 1983, was noted on the cross-index plat and is assigned page No. 2351, in book No. (Janet B. Siegel by Betty L. Conner)

County Official

deputy

COR. NO. 2	H.E.S. NO. 1059
-	-
APPROX. ONLY	-
-	3.0
-	-