

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

2 of HES 1059
 Corner 3 of HES 1074 T. 35 N., R. 33 W., P.M.M. Lincoln County

- I. 1921, original H.E.S. 1059 & 1074 record by G. Higgins: "Place a small stone, marked with a cross (x) under a sandstone, 25x12x8 ins., 16 ins. in the ground, marked 2 H.E.S. 1059 on NE. face and a cross (x) on top for the exact corner point. No bearings available; pits impracticable. Raise a mound of stone, 4 ft. base, 2 ft. high NE. of corner."

1983 filed corner recordation by M. Lauteren, Reg. No. 4232S: "found a 12x8 ins. stone, approx. 7 ins. above ground, marked 2 HES 1059 on NE face and 3 HES 1074 on SE face and a faint cross (x) on top for the exact corner point. Found a mound of stone NE of corner. Found a mound of stone SE of corner."

Perpetuation: "Painted original stone monument marking corner No. 2 HES No. 1059 red, drive lath and stake alongside with identifying information, from which:

A larch tree, 9 ins. dia., bears N87°W, 10.3 ft. dist.

A larch tree, 10 ins. dia., bears N17°E, 4.2 ft. dist.

Each marked with a cross (x) above a blaze scribed: 2 HES 1059 BT, cross and face of blaze"

- II. Found a stone, 8x10 ins., 12 ins. above ground, chisel marked 2 HES 1059 on N face, 3 HES on SE face, and X on top, from which:

A fallen larch, 11 ins. dia., bears N12°E, 4.5 ft. dist., scribed X and 2 HES 1059 BT.

A larch, 9 ins. dia., bears N90°W, 10.2 ft. dist., scribed X and scribing visible.

- III. Established one new bearing tree:

A larch, 10 ins. diam., bears N28°E, 19.0 ft. dist., scribed 2 HES 1059 BT.

Painted red bands around the bearing trees and attached "Land Survey Monument" and "Bearing Tree" signs where needed.

Set a 6 ft. galvanized steel guard post with "Land Survey Marker" and "Property Boundary" decals, N2°W, 3.7 ft.

Magnetic Declination: 20°30' East

CERTIFICATION

I, Jane L. Eby
 certify the information shown herein is true and correct.


Jane L. Eby
 Signature of Ground Party Chief

I, Alvah F. Hughes
 certify that this Corner Record correctly represents the information furnished by me or under my direction in compliance with the Montana Corner Recordation Act" (70-22101, et seq.) (M.S.A.)

Alvah F. Hughes
 Signature of Surveyor & Seal

Date: 12/7/89 Reg. No. 7322

Employer: U.S. FOREST SERVICE

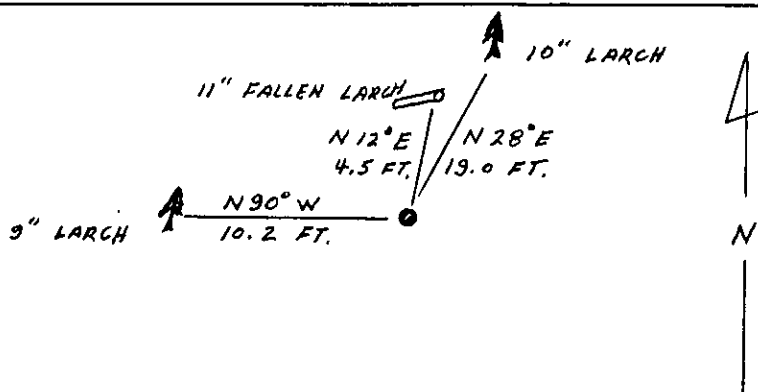

SKETCH OF CORNER

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Dec 19, 1989 was noted on the cross-index plat and is assigned page No. 4165, in book No. _____

Cross Index No. 2HES1059 T. 35 N R. 33 W P.M.M.

