

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example. corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 2 of HES 405 T. 35 N. R. 33 W. P.M.M. Lincoln County

- I. 1915, original H.E.S. record by E. Johnson: "Set for Cor. No. 2, a sandstone 24x10x8 ins., 14 ins. in the ground, marked 2 H.E.S. 405 on NE. face, and a cross (x) on top for the exact corner point, from which

A cross (x) on a red fir, 10 ins. dia., bears N16°35'E, 31 lks. dist.

A cross (x) on a larch, 18 ins. dia., bears East, 22 lks. dist.; each blazed and scribed 2 H.E.S. 405 BT.

Raise a mound of earth 4 ft. base, 2 ft. high, NE. of corner."

- II. Found a firmly set stone 8x6 ins., 10 ins. out of ground, marked 2 HES 405 on NE face and X on top from which;


A douglas fir, 29 ins. dia., bears N16°E, 20.0 ft. (30.3 lks.) dist., overgrown scribe, X visible

A larch, 26 ins. dia., bears S88°E, 14.2 ft. (21.5 lks.) dist., overgrown scribe, X visible.

- III. Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, N34°W, 4.7 ft.

Painted a red band around each bearing tree and attached Survey Monument and bearing tree signs.

Declination: 20°30'E

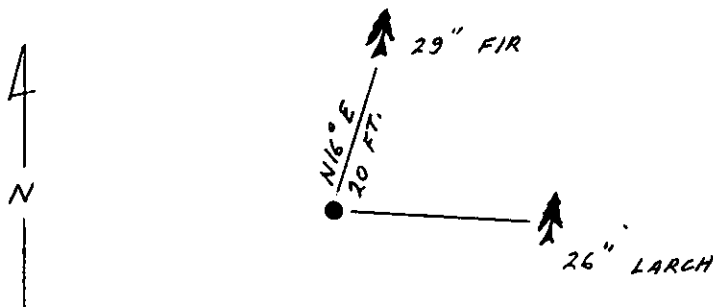

SKETCH OF CORNER

CERTIFICATION

I, Gary C. Crismon
certify the information shown herein is true and correct.

Gary C. Crismon
Signature Ground Party Clerk

I, Alvah P. Hughes
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Montana Corner Recordation Act" (70-22-101, et seq. M.C.A.)

Alvah P. Hughes
Signature of Surveyor & Seal


Date: 8/23/89 Reg. No. 7322-8

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Dec 19, 1989 was noted on the cross-index plat and is assigned page No. 4166, in book No. _____

Cross Index No. 2HES405 T. 35 N R. 33 W P.M.M.

Sec. 31



• - corner this sheet