

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

4 of HES 1071

35 N.,

33 W.,

Lincoln

Corner \_\_\_\_\_ T. \_\_\_\_\_ R. \_\_\_\_\_ P.M.M. \_\_\_\_\_ County

- I. 1921 H.E.S. original record by Grant Higgins: Placed a small stone, marked with a cross (x) under a sandstone, 24x12x6 ins., 14 ins. in the ground, marked 4 HES 1071 on SW face and a cross (x) on top for the exact corner point, from which,

A cross (x) on a larch tree, 17 ins. dia., bears  $N48^{\circ}30'E$ , 8 lks. (5.28 ft.) dist.

A cross (x) on a white pine tree, 16 ins. dia., bears  $S53^{\circ}04'E$ , 64 lks. (42.24 ft.) dist.

Each blazed and scribed 4 HES 1071 BT.

Raise a mound of stone, 4 ft. base, 2 ft. high, SW of corner.

- II. Found a 12x6 ins. stone, firmly set, protruding 8 ins. out of the ground, mkd. 4 HES 1071 on SW face and a cross on top. Dispersed mound of stone SW of corner.

From which:

A larch, 27 ins. dia., bears  $N43^{\circ}E$ , 5.8 ft. dist., mkd. HES 1071 BT.

A snag, 20 ins. dia., bears  $S55^{\circ}E$ , 44.8 ft. dist., mkd. 4 HES 1071 BT.


- III. Established one new bearing tree

A larch, 11 ins. dia., bears  $S6^{\circ}W$ , 17.9 ft. dist., mkd. 4 HES 1071 BT.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals,  $N3^{\circ}E$ , 3 ft.

Magnetic declination:  $20^{\circ}$  East.

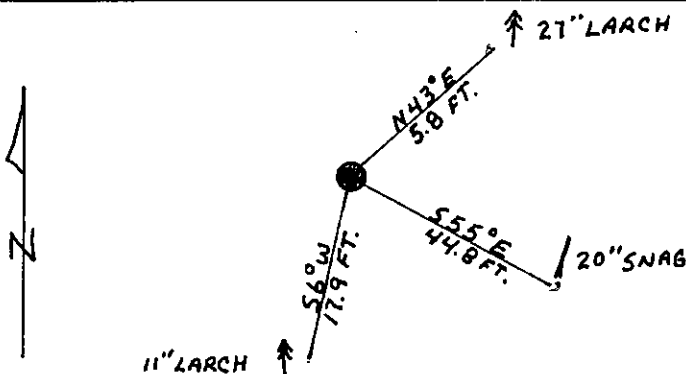

SKETCH OF CORNER

## CERTIFICATION

Gary Crismon

I, \_\_\_\_\_  
certify the information shown herein is true and correct.

*Gary Crismon*  
Signature Ground Party Chief

Alvah F. Hughes

I, \_\_\_\_\_  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

*Alvah F. Hughes*  
Signature of Surveyor & Seal

1/8/91

Date: \_\_\_\_\_ Reg. No. \_\_\_\_\_

U.S. FOREST SERVICE

Employer: \_\_\_\_\_

Office of Clerk and Recorder, County of Lincoln. This "corner

record" was filed for record on 1-10-91

was noted on the cross-index plat and is assigned page No. 4469, in

book No. \_\_\_\_\_


*Coral McCummings by Bill Buehler*  
County Official

4 HES 1071

35 N

33 W.

Cross Index No. \_\_\_\_\_ T. \_\_\_\_\_ R. \_\_\_\_\_ P.M.M.



• - corner this sheet