

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

COR. 2 of HES 407  
 Corner \_\_\_\_\_ T. 35 N. R. 33 W. Lincoln County

- I. 1915 H.E.S. original record by Elmer R. Johnson: Set for Cor. No. 2, a slate stone, 26x10x6 ins., 16 ins. in the ground, marked 2 HES 407 on SW face, and a cross (x) on top for the exact corner point, from which:

A cross (x) on a black pine, 9 ins. diam., bears  $S39^{\circ}48'W$ , 17 lks. dist.  
 A cross (x) on a larch tree, 8 ins. diam., bears  $S16^{\circ}17'E$ , 25 lks. dist.  
 Each blazed and scribed 2 HES 407 BT.

Raise a mound of stone, 4 ft. base, 2 ft. high, SW of corner.

- II. Found a 9x6 ins. stone, firmly set, protruding 12 ins. above the ground, mkd. 2 HES 407 on SW face and 3 HES 405 on NE face, from which:

A larch, 17 ins. diam., bears  $S16^{\circ}E$ , 15.6 ft. dist., overgrown blaze.  
 A dead lodgepole pine, 14 ins. diam., bears  $S40^{\circ}W$ , 11.3 ft. dist., scribing visible.


- III. Established one new bearing tree

A white pine, 24 ins. diam., bears  $N87^{\circ}E$ , 10.5 ft. dist., mkd. 2 HES 407 BT.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals,  $S32^{\circ}E$ , 3 ft.

Magnetic declination:  $20^{\circ}$  East.

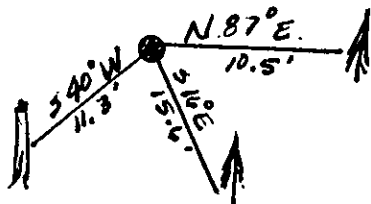

SKETCH OF CORNER

## CERTIFICATION

I, Kevin A. Todd  
 certify the information shown herein is true and correct.


Signature Ground Party Chief

I, Alvah F. Hughes  
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor & Seal ALVAH F. HUGHES  
 Date: 11/6/91 Reg. No. 7322  
 Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 4-21-92  
 was noted on the cross-index plat and is assigned page No. 5040, in book No. \_\_\_\_\_  
Coral M. [Signature]  
 County Official

Cross Index No. 3 HES 407 34 N 33 W  
 T. \_\_\_\_\_ R. \_\_\_\_\_ PMM



• - corner this sheet