

CERTIFIED CORNER RECORDATION

Corner NW 16th Sec 7 T. 35N R. 25W P.M.M. Lincoln County

Found:


A 5/8 ins. Rebar with Plastic Cap set by LS 13102.

Set:

(Put a new 3 1/4 inch) USFS Aluminum Monument, (on existing 5/8 inch rebar) mkd. as shown.
A Larch, 7 ins. in diam., bears S25°E, 12.1 ft. dist. scribed "NW 1/16th S7 BT";
A Douglas Fir, 9 ins. in diam., bears S25°W, 3.0 ft. dist., scribed "NW 1/16th S7 BT";
Steel posts with decals, bear South, 3.0 ft. dist. and West, 3.0 ft. dist.



MAGNETIC DECLINATION - 15°4' EAST

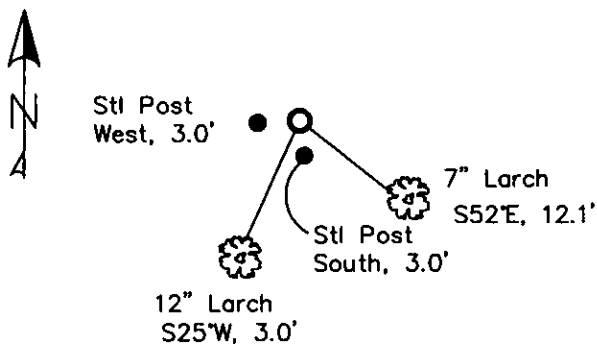

SKETCH OF CORNER

CERTIFICATION

I, Erich Shrack
certify the information shown herein is true and correct.

I, LAWRENCE A. GLAHE
certify that this Corner Recordation was performed by me or under my direction in compliance with the "Corner Recordation Act", 1905-1906, et seq. (M.C.A.)

Date: 11-10-10 9748 LS
Employer: GLAHE & ASSOC., INC.

Office of Clerk and Recorder, County of Lincoln. This "corner


record" was filed for record

was noted on the cross-index

book No. _____

229649 BOOK: CCR CCR'S PAGE: 11633 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
RECORDED: 11/15/2010 1:28 KOI: CCR'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY: Lauree K. Kunkle
TO: GLAHE & ASSOC., INC. P.O. BOX 1863, SANDPOINT, ID. 83860,
Cross Index No. F-2 T. 35N R. 25W PMM

Sec. 7



● corner this sheet

1. *Chlorophyll a* and *Chlorophyll b* were determined by the method of Arar and Collins (1971) using a Shimadzu 1601 UV-Visible Spectrophotometer.

[illegible]