

INSTRUCTIONS


1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 2 of HES 1260 T. 35 N. R. 25 W. P.M.M. Lincoln County

I. 1942 H.E.S. original record by A. O. Modlin: "Cor. No. 2 of this survey, as follows:

Place a limestone 5 x 4 x 2 ins. marked with a cross (x) under a iron post 3 ft. long, 2 ins. diameter, 26 ins. in the ground, with a brass cap marked as follows:



The point of the brass cap is the exact corner point.

From which:

A cross (X) on a spruce, 8 ins. diameter, bears N. $44^{\circ} 40'$ E., 32 lks. dist.

A cross (X) on a spruce, 8 ins. diameter, bears N. $27^{\circ} 00'$ E., 26 lks dist.


each blazed and scribed 2 H E S 1260 B T.

Raise a mound of earth 4 ft. base, 2 ft. high, NE. of corner."

II. The corner stone is obliterated as its position lies in a cultivated field. At a position determined by survey, I excavate 26 ins. in the ground and find the original memorial stone, 6x7x2 ins., with an "x" on the top, per original record.

No bearing trees found.

III. At the position of the found "x" stone, I set aluminum pipe, 24 ins. long, 2 1/2 ins. diam., 14 ins. below the ground surface, with a 3 1/4 ins. diam. aluminum cap, marked as shown:



Placed a piece of rebar inside monument for location purposes only.


Established two bearing trees:

A fir, 9 ins. diam., bears N $9^{\circ} 00'$ E., 44.5 ft. dist, scribed 2 HES 1260 BT.

A cedar, 12 ins. diam., bears N $27^{\circ} 00'$ W., 58.9 ft. dist, scribed 2 HES 1260 BT.

Painted red bands around the bearing trees and attached "Land Survey Monument" and "Bearing Tree" signs and set a 6 ft. galvanized steel guard post with "Land Survey Marker" decal attached, N $19^{\circ} 00'$ W 40.8 ft. dist from corner.

Magnetic declination: 20° East

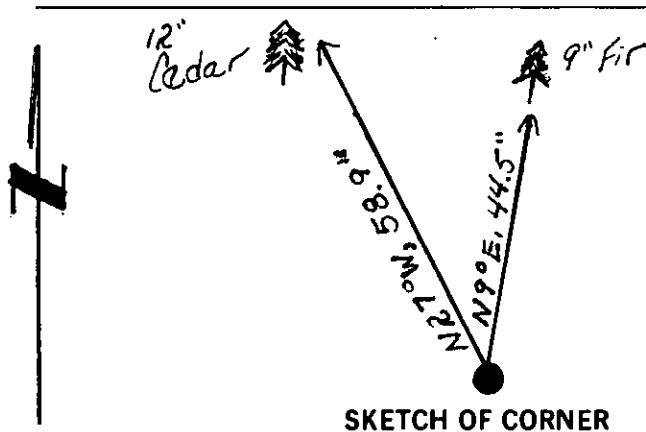

SKETCH OF CORNER

CERTIFICATION

I, Steven A. Boyer
certify the information shown herein is true and correct.

Steven A. Boyer
Signature Ground Party Chief

I, Alvah F. Hughes
certify that this Corner Record correctly represents the corner as shown by me or under my direction in compliance with the Montana Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah F. Hughes
Signature of Surveyor Seal HUGHES


Date: 04/27/92 Reg. No. 7322 LS 7322 LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on April 27, 1995 was noted on the cross-index plat and is assigned page No. 7021, in book No. Corral M. Cummings By DB

County Official

2 HES 1260 35 N 25 W
Cross Index No. T. R. PMM



• - corner this sheet

7

8

9

10

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

101