

CERTIFIED CORNER RECORDATION

Corner 1/4 COR. SECS. 12 & 7

T. 35N. R. 26W., PMM

LINCOLN County

RECORD

GLO 1898 Set a Limestone 12X10X7 in

BLM 1960 The 1/4 sec. cor of secs. 7 & 12 on the west bdry of Tp., monumented with a limestone 12x10x7 ins marked 1/4 on one face, lying on the ground at the intersection of fences, and witnessed by the remains of the original bearing trees. At the point- Set an iron post 30" long 2 1/2" diam. 26" in the ground, in concrete, with a brass cap the remains of the orig. BTs

a fir stump 18" diama fir stump 16" diam...

New BTs a larch 6 " diam. bears N77° E 21 links dist mked 1/4 S7 BT

A larch 10" diam. bears N 39 1/2° W 7 links dist mked 1/4 S12 BT

(1989) C.O.S. No.1711, found B.L.M. brass cap

FOUND:

Found a 3 1/4" B.L.M. brass cap marked as shown below, in a 3' diam. mound of stone, from which we found the following references:

A 10" diam. Tamarack with B.T. tags, healed blaze and red paint bears N.80° E., 13.7'


A 10" diam. Tamarack with B.T. tag, visible scribing and red paint bears S.10° E., 9.7'

A 10" diam. Tamarack with B.T. tags, visible scribes and incorporated into a woven wire fence bears N.37° W., 4.1'.

Blazed line trees north and south of the corner.

SET:

Set an MDT witness post with decal 1' north of corner
SEE DETAIL ON BACK

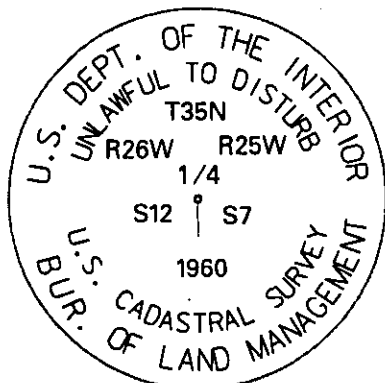

SKETCH OF CORNER

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on 9-10-23 Doc # 170423 was noted on the cross-index plat, and is assigned Page No. 10612 in Book No. 625

County Official

CERTIFICATION

I, Jim Turner

certify the information shown herein is true and correct.

Signature of Ground Party Chief


I, Donald M. Roedel

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-01 et seq., MCA)

Signature of Surveyor & Seal

Date: 9-10-23 Reg. No. 10999LS

Employer: MDT REGISTERED SURVEYOR Sec. 12

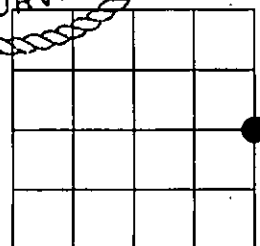

• - Corner this sheet

