


CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

Record, set quartzite stone 14"x10"x5"  
Fir. 16" N 45 E 20 lks..  
Fir. 14" N 30 W 29 lks.  
Corner was set by single proportion between NE cor.of Sec. 28 and the  
SE cor. of Sec. 28.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED  
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: 1973

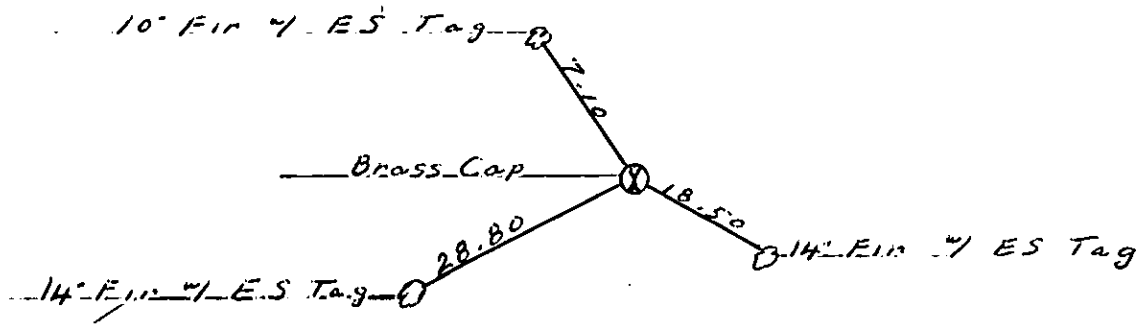


SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.  
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

Surveyor's Seal

I, Sherman D. Marquardt  
certify that the information shown herein is true and  
correct.  
*Sherman D. Marquardt*  
Signature of Ground Party Chief

I, Dean K. Marquardt  
certify that I have carefully performed or reviewed the  
work done on the diagrammed corner as reported on this  
recording form and approve the same.  
*Dean K. Marquardt*  
Signature of Surveyor

DIAGRAM OF CORNER:



ⓧ = Corner recorded on the sheet

ES. 29.8.9  
Registration Number

Office of Clerk and Recorder, County of Lincoln  
This "corner record" was filed for record on the 17th day of July, 1981, was noted on the cross-index plat and is  
assigned page No. 1145, in book No. 1  
Clemens L. Taughon, by Betty Bell  
County Official Deputy  
Form 125-41328  
Cross Index No. T-13 T. 35N R. 26W Mer.

