

# CERTIFIED CORNER RECORDATION

Corner E 1/4 Cor Sec 13 T. 35N R. 26W P.M.M. Lincoln County

## 1. 1894 G.L.O. Original Record by A.L. Jaqueth et al:

Set:

A Limestone 15 x 7 x 5 ins., 10 ins. in the ground for 1/4 section corner, mkd.  
1/4 on North face

From which:

A Tamarack, 16 ins. in diam., bears S49°E, 22 lks. dist., mkd. 1/4 S. B.T.;  
A Tamarack, 26 ins. in diam., bears N50°W, 42 lks. dist., mkd. 1/4 S. B.T.

## 1960 BLM Remonumentation by Cunningham & Stephens:

Set:

A 2 1/2 ins. Iron Pipe with Brass Cap set from found original evidence, mkd. as shown;

From which:

A Fir, 6 ins. in diam., bears S 50 3/4° E, 66 lks. dist.;  
A Fir, 7 ins. in diam., bears N 47 1/4° W, 49 lks. dist.;

## 1980 Certified Land Corner Record by Thomas C. Hill:

Found:

A Brass Cap, 2 1/2 ins. in diam., 3 ins. above ground, mkd. as shown;  
A mound of stone approx. 2.0 ft. W;

From which:

A Douglas Fir, 10 ins. in diam., bears N50°W, 32.4 ft. dist., healed face, alive and well;  
A Larch Stump, 14 ins. in diam., bears S50°E, 15.1 ft. dist.;

Established:

A Douglas Fir, 10 ins. in diam., bears S26°E, 23.6 ft. dist., mkd. 1/4 S18 BT;  
Attached 1 bearing tree sign, painted red bands around bearing trees and attached location poster to Fir, 7 ins. in diam., bears S34°W, 6.9 ft. dist.


## 2. Found:

A BLM Brass Cap, 3 1/4 ins. in diam., 0.2 ft. above ground, mkd. as shown;  
A Douglas Fir, 14 ins. in diam., bears S26°E, 23.6 ft. dist. with healed face;  
A Douglas Fir, 13 ins. in diam., bears N47°W, 32.4 ft. dist. with healed face;  
A Douglas Fir with K Tag, bears S34°W, 6.9 ft. dist.


## 3. Placed rocks around monument. Painted bands and blazes on existing BTs.

Established:

A BT Snag bears S49°E, 22 lks. dist.  
A Steel post with LSM decal, bears North, 2 ft. dist;



MAGNETIC DECLINATION - 15°4' EAST

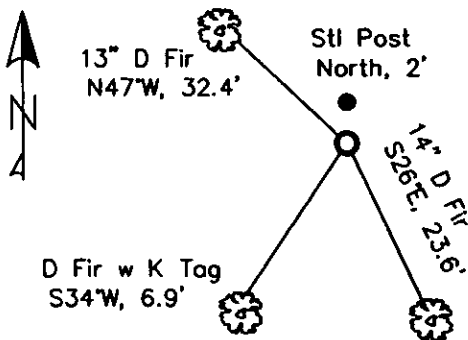

SKETCH OF CORNER

CERTIFICATION

I, Erich Shrock  
certify the information shown above is true and correct.

I, LAWRENCE A. GLAHE  
certify that this Corner Recordation represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (Pub. Law 96-240, et seq. (U.S.A.))

Date: 12/6/10 9748 LS  
Employer: GLAHE & ASSOCIATES, INC.

Office of Clerk and Recorder, County of Lincoln. This "corner

record" was filed for record on

230116 BOOK: CCR CC&R'S PAGE: 11714 Pages: 1

was noted on the cross-index

STATE OF MONTANA LINCOLN COUNTY

book No. \_\_\_\_\_

RECORDED: 12/09/2010 12:38 KOI: CC&R'S

TAMMY D. LAUER CLERK AND RECORDER

FEE: \$0.00

BY: Thomas C. Hill

TO: GLAHE & ASSOC., INC. P.O. BOX 1863, SANDPOINT, ID. 83860,

Cross Index No. L-25 T. 35N R. 26W PMM

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors


● corner this sheet

