

CERTIFIED CORNER RECORDATION

Corner CS 1/16 Sec 13 T. 35N R. 26W P.M.M. Lincoln County

1. Original GLO Notes:

This corner was never set.

2. Found:


None.

3. Established:

Set a 3 1/4 inch Aluminum cap on 5/8 inch rebar 0.4 ft. above ground stamped as shown.
A D. Fir, 9 ins. in diam. bears N10°E, 23.7 ft. dist., scribed CS 1/16 S 13 BT.
A Larch, 10 ins. in diam. bears N75°W, 36.7 ft. dist., scribed CS 1/16 S13 BT.
A Steel post with LSM decal, bears East and West.



MAGNETIC DECLINATION - 15°4' EAST

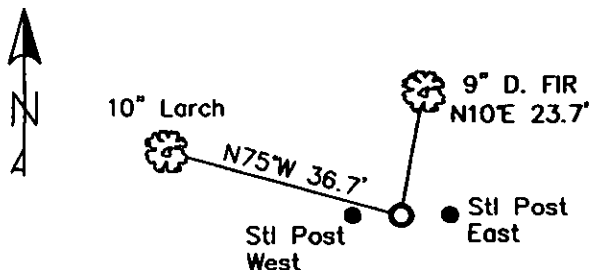

SKETCH OF CORNER

CERTIFICATION

I, Erich Shrack
certify the information shown herein is true and correct.

LAWRENCE A. GLAHE
certify that this Corner Recordation represents work performed by me or under my direct supervision in compliance with the "Corner Recordation Act" (MCA 82-221-101, et seq.)

Date: 12-6-10 9748 LS
Employer: GLAHE & ASSOC., INC.

Office of Clerk and Recorder, County of Lincoln This "corner

record" was filed for record

was noted on the cross-in-


book No. _____

230121 BOOK: CCR CC&R'S PAGE: 11719 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
RECORDED: 12/09/2010 12:43 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY: Seamus D. Smith
TO: GLAHE & ASSOC., INC. P.O. BOX 1863, SANDPOINT, ID. 83860

Cross Index No. M-23 T. 35N R. 26W PMM

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

Sec. 13



● corner this sheet

