

- INSTRUCTIONS**
1. Original and/or subsequent record used to evaluate the corner position.
 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 3. Description of monument and accessories set to perpetuate the corner position.
 4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography etc., position of accessories, etc.
 5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION


Corner 1/4 S2 S1

T. 35N. R. 26W. P.M.M. Lincoln County

RECORD: Original G.L.O. - 1894

B.L.M. remon. notes:

The cor. of sec. 1 and 2, monumented with a limestone, 20 x 12 x 7 ins., set and marked as described in the official record and witnessed by the remains of the two original bearing trees.
At the corner pt., set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 28 ins. in the ground, in concrete, with brass cap mkd.



From which;

The remains of the original bearing trees:

- A fir stump, 18 ins. diam., bears S.41 3/4 E., 23 lks dist., visible mks. BT. (Record)
- A fir stump, 19 ins. diam., bears N.52 W., 50 lks. dist., visible marks BT. (Record: N. 54 W.)



The new bearing trees:

- A fir, 6 ins. dia., bears N.48 E., 18 lks. dist. mkd. 1/4 S1 BT.
- A fir, 9 ins. dia., bears S. 12W., 31 lks. dist. mkd. 1/4 S2 BT.

Bury the original stone alongside and raise a mound of stone, 2 ft. base, 1.5 ft. high, W. of the iron post.

FOUND: A $3\frac{1}{2}$ " diam. brass B.L.M. cap approx. 3" above grnd. adjacent to mound of stone, mkd. as shown.

(see reverse side)

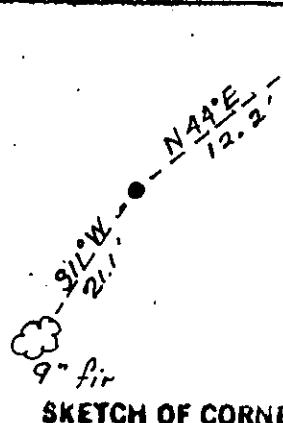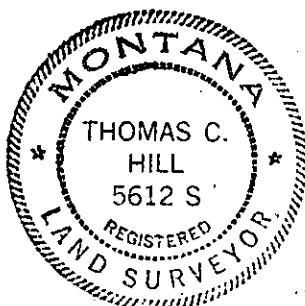

SKETCH OF CORNER

James W. Reed CERTIFICATION

I certify the information shown herein is true and correct.

James W. Reed
Signature Ground Party Chief

Thomas C. Hill


I certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (M.S. 10-10-10), et seq., M.D.A.

Thomas C. Hill
Signature of Surveyor & Seal

Date: 3/15/83 Reg. No. 5612 S

Employer: U.S.F.S.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the June 16 day of 1983, was noted on the cross-index plat and is assigned page No. 2236, in book No. Janet B. Siegel by Betty L. Conces
County Official deputy

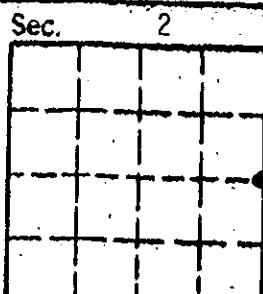

Cross Index No. C-21 T. 35 R. 26 P.M.M.

* - corner this sheet

From which:

A fir 9" diam., bears S.11 W. 21.1 ft. dist., healed face.

A stump 22" diam., bears S.42 E. 15.3 ft. dist., with BT sign.

A fir 9" diam., bears N.44 E. 12.2 ft. dist., healed face.

A stump 24" diam., bears N.54 W. 33.7 ft., with BT sign.