

- INSTRUCTIONS**
1. Original and/or subsequent record used to establish the corner position.
  2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
  3. Description of monument and accessories set to perpetuate the corner position.
  4. Sketch or sketch, show all pertinent data which can best be shown in a sketch example, corner marking, topography, trees, position of accessories, etc.
  5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
  6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner S35 S36  
S2 S1

36 N.

T. 35 N.

R. 26 W.

P.M.M. Lincoln


County

RECORD: Original G.L.O. - 1894

B.L.M. remon. notes.

The cor. of secs. 1,2,35, and 36, on the S. bdy. of the Tp., monumented with a broken quartzite stone, 16"X12"X8", firmly set and mkd. with 1 notch on the E. edge, and witnessed by the remains of three of the original bearing trees.

At the corner point set an iron post, 30" long, 2½" diam., 27" in ground, in concrete, with brass cap mkd.



From Which:

The remains of the original bearing trees:

A larch, 18" diam., bears S.71½°E., 27 lks. dist., visible mks. BT. (Record)  
A dead fir, 20" diam., bears S.28½°W., 34 lks. dist., mkd. T35N R26W S2 BT. (Record)

A stump, 36" diam., bears N.74½°W., 35 lks. dist., visible mks. BT. (Record)



The new bearing trees:

A fir, 8" diam., bears N.28°E., 77 lks. dist., mkd. T36N R26W S36 BT.  
A fir, 8" diam., bears S.56½°E., 39 lks. dist., mkd. T35N R26W S1 BT.  
A fir, 8" diam., bears S.61°W., 40 lks. dist., mkd. T35N R26W S2 BT.  
A fir, 8" diam., bears N.36½°W., 41 lks. dist., mkd. T36N R26W S35 BT.

Bury the original stone alongside and raise a mound of stone, 3' base, 2' high, S. of the iron post.

FOUND: A 3½" diam. B.L.M. brass cap mkd. as shown and adjacent to that a 3'X3"X3" standing post.

(see reverse side)

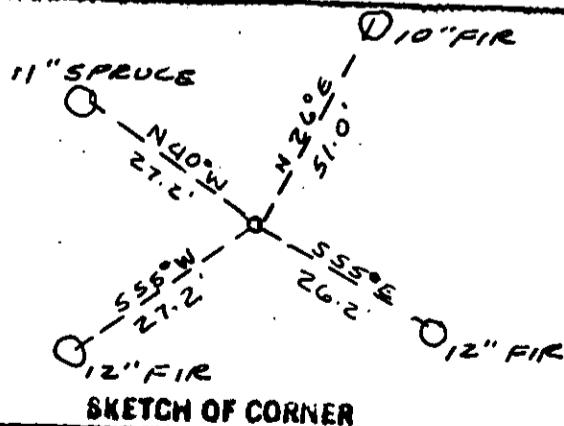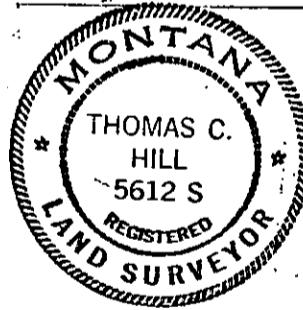

CERTIFICATION

James W. Reed  
Certify the information above herein is true and correct.

Signature: James W. Reed  
Signature Certified Party Child  
Thomas C. Hill

Certify that this Corner Record correctly represents work performed  
by me or under my direction in compliance with the "Surveyor  
Registration Act" (10-23-10), et seq., M.D.A.

Signature: Thomas C. Hill  
Signature of Surveyor James W. Reed  
Date: 3/15/83 Reg. No. 5612 S  
Employer: U.S.F.S.

Office of Clerk and Recorder, County of Lincoln. This "corner  
record" was filed for record on the June 16 day of 1983  
was noted on the cross-index plat and is assigned page No. 223, in  
book No. Janet B. Siegel by Betty L. Conner  
County Official / Deputy

Sec. 2



Cross Index No. A-21 T. 35 R. 26 P.M.

\* - corner this sheet

From which:

- A fir, 12" diam., bears S.55 W. 27.2 dist., healed face.
- A stump, 30" diam., bears N.75 W. 23.4' dist., with BT sign.
- A spruce, 11" diam., bears N.40 W. 27.2' dist., healed face.
- A fir, 10" diam., bears N.26 E. 51.0' dist., healed face.
- A pine stump, 13" diam., bears S.77E. 17.9' dist., with BT sign.
- A fir, 12" diam., bears S.55 E. 26.2' dist., healed face.