

**INSTRUCTIONS**

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lines, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

**CERTIFIED CORNER RECORDATION**

Corner S1|S6 S12|S7 T 35N R 26W P.M.M. Lincoln County


RECORD: Original G.L.O. survey - 1894

B.L.M. remonumentation:

The corners of secs. 1, 6, 7, and 12, monumented with a limestone, 12X8X6 ins., firmly set and mkd. with 1 groove on N. face and 5 grooves on S. face, and witnessed by the remains of the four original bearing trees.

At the corner point

Set an iron post, 30" long, 2½" diam., 26" in the ground, in concrete, with brass cap mkd.



from which

The remains of the original bearing trees:



A larch stump, 17" diam., bears N 71°E, 42 lks. dist., visible marks BT. (Record)

A larch stump, 16" diam., bears S 68½°E, 36 lks. dist., visible marks BT. A fallen log lying alongside is marked T35 R26W S7. (record)

A fir stump, 24" diam., bears S 72½°W, 83 lks., visible marks BT. (Record)

A fir stump, 20" diam., bears N 42°W, 24 lks. dist., visible marks R27 S12 BT. (Record: N.42 W., 42 lks)

(See reverse side)

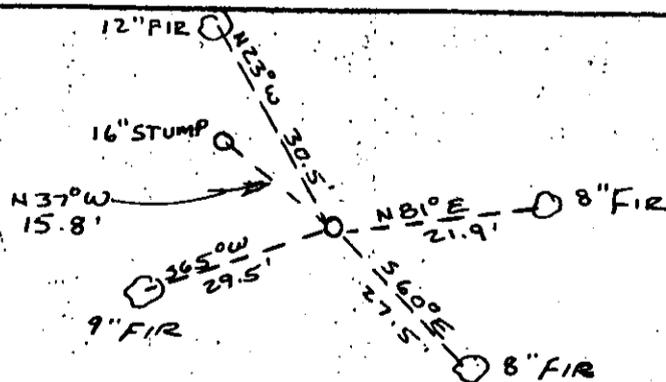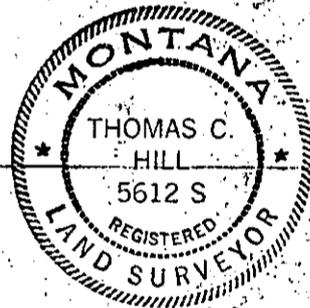


SKETCH OF CORNER

**CERTIFICATION**  
 James W. Reed  
 I certify the information shown herein is true and correct.  
*James W. Reed*  
 Signature Ground Party Chief  
 Thomas C. Hill  
 I certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Corner Recordation Act (10-29-101, et seq., M.D.A.)  
*Thomas C. Hill*  
 Signature of Surveyor & Seal  
 Date: 3/15/83 Reg. No. 5612 S  
 Employer: U.S.F.S.

Office of Clerk and Recorder, County of Lincoln This "corner record" was filed for record on the June 16th day of 1983 was noted on the cross-index plat and is assigned page No. 2243 in book No. \_\_\_\_\_

Janet BF Siegel by Betty L. Conner  
 County Official deputy

Cross Index No. E-1 T. 35 R. 26 P.M.M.

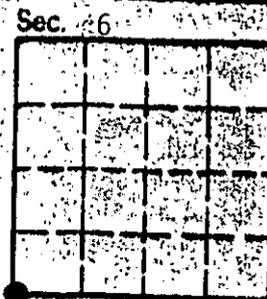

• corner this sheet

The new bearing trees:

A fir, 8" diam., bears N.80°45'E., 35 lks. dist., mkd. T35N R26W S6 BT.

A fir, 7" diam., bears S.61½°E., 42 lks. dist., mkd T35N R26W S7 BT.

A fir, 8" diam., bears S.64½°W., 45 lks. dist., mkd. T35N R27W S12 BT.

A fir, 13" diam., bears N.24°W., 46 lks. dist., mkd. T35N R27W S1 BT.

Bury the stone alongside and raise a mound of stone, 3 ft. base, 2 ft. high, W. of the iron post.

FOUND: A 3½" diam. B.L.M. brass cap approx. 4" above ground, mkd as shown on reverse side.

from which

A fir 12" diam., bears N.23°W., 30.5 feet dist., healed face.

A fir 8" diam., bears N.81°E., 21.9 feet dist., healed face.

A fir 8" diam., bears S.60°E., 27.5 feet dist., healed face.

A fir 9" diam., bears S.65°W., 29.5 feet dist., healed face.

A stump 16" diam., bears N.37°W., 15.8 feet dist., B.L.M. BT sign.